

A1. Wiring Ducts

## EASCO® GAR Type Wiring Duct (GAR型阻燃环保配线槽)

A2. Cable Ties

Materials: Lead-Free PVC.

Feature:


- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

A3. Din Rails

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.


A4. Cable Markers




A5. Cable Clamps

A6. Wrapping Bands


A7. Nylon Cable Gland



A8. Metal Cable Gland



A9. Plastic Flexible Conduit



A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Narrow (S)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	宽齿 (L)	窄齿 (S)	包装数 (根)
A0101.001.0089	GAR1616	16	16	L	S	200
A0101.001.0090	GAR2516	25	16	L	S	120
A0101.001.0078	GAR1520	15	20	L	S	200
A0101.001.0001	GAR2020	20	20	L	S	116
A0101.001.0091	GAR4020	40	20	L	S	70
A0101.001.0002	GAR1525	15	25	L	S	150
A0101.001.0003	GAR2025	20	25	L	S	116
A0101.001.0004	GAR2525	25	25	L	S	90
A0101.001.0005	GAR3025	30	25	L	S	60
A0101.001.0006	GAR4025	40	25	L	S	60
A0101.001.0007	GAR5025	50	25	L	S	50
A0101.001.0092	GAR1530	15	30	L	S	100
A0101.001.0008	GAR2030	20	30	L	S	96
A0101.001.0009	GAR2530	25	30	L	S	72
A0101.001.0010	GAR3030	30	30	L	S	60
A0101.001.0011	GAR3530	35	30	L	S	56
A0101.001.0012	GAR4030	40	30	L	S	50
A0101.001.0013	GAR3333	33	33	L	S	56
A0101.001.0085	GAR2035	20	35	L	S	80
A0101.001.0014	GAR2535	25	35	L	S	72
A0101.001.0015	GAR3535	35	35	L	S	50
A0101.001.0016	GAR5035	50	35	L	S	50
A0101.001.0093	GAR2040	20	40	L	S	70
A0101.001.0017	GAR2540	25	40	L	S	60
A0101.001.0079	GAR3040	30	40	L	S	50
A0101.001.0080	GAR3540	35	40	L	S	50
A0101.001.0018	GAR4040	40	40	L	S	50
A0101.001.0019	GAR6040	60	40	L	S	40
A0101.001.0020	GAR8040	80	40	L	S	32
A0101.001.0094	GAR10040	100	40	L	S	18
A0101.001.0095	GAR12040	120	40	L	S	12
A0101.001.0021	GAR2545	25	45	L	S	54
A0101.001.0022	GAR3345	33	45	L	S	42
A0101.001.0023	GAR4545	45	45	L	S	46
A0101.001.0024	GAR6545	65	45	L	S	36
A0101.001.0025	GAR2550	25	50	L	S	50
A0101.001.0026	GAR3050	30	50	L	S	60
A0101.001.0027	GAR3550	35	50	L	S	54
A0101.001.0028	GAR4050	40	50	L	S	50
A0101.001.0029	GAR4550	45	50	L	S	40
A0101.001.0030	GAR5050	50	50	L	S	40
A0101.001.0031	GAR5550	55	50	L	S	40
A0101.001.0032	GAR6050	60	50	L	S	34
A0101.001.0096	GAR7550	75	50	L	S	24
A0101.001.0033	GAR8050	80	50	L	S	26
A0101.001.0034	GAR10050	100	50	L	S	20

WxH

Wide Slot (L)  
宽齿(L)

Narrow Slot (S)  
窄齿(S)



- G = Gray
- W = White
- B = Black
- BL = Blue

\*Catalog number must be completed by adding suffix L for wide slot, S for narrow slot, G for Gray, W for White, BL for Blue, B for Black.  
Example: GAR5050LG" wide slot gray duct.


\*目录号必须添加后缀L(宽槽), S(窄槽), G(灰色), W(白色), BL(蓝色), B(黑色)。示例:GAR5050LG"宽槽灰色。

\*The product is sold as a set of base and cover, No need to order another cover.


## EASCO® GAR Type Wiring Duct (GAR型阻燃环保配线槽)




WxH




Wide Slot (L)  
宽齿(L)



Narrow Slot (S)  
窄齿(S)



Wide Slot (LR)  
宽齿(LR)



Narrow Slot (LR)  
窄齿(LR)

Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Narrow (S)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	宽齿 (L)	窄齿 (S)	包装数 (根)
A0101.001.0097	GAR2060	20	60	L	S	70
A0101.001.0035	GAR2560	25	60	L	S	66
A0101.001.0036	GAR3060	30	60	L	S	60
A0101.001.0037	GAR3560	35	60	L	S	50
A0101.001.0038	GAR4060	40	60	L	S	42
A0101.001.0039	GAR4560	45	60	L	S	42
A0101.001.0040	GAR5060	50	60	L	S	36
A0101.001.0041	GAR5560	55	60	L	S	36
A0101.001.0042	GAR6060	60	60	L	S	30
A0101.001.0043	GAR8060	80	60	L	S	22
A0101.001.0044	GAR10060	100	60	L	S	18
A0101.001.0098	GAR12060	120	60	L	S	16
A0101.001.0045	GAR7264	72	64	L	S	24
A0101.001.0046	GAR2565	25	65	L	S	60
A0101.001.0047	GAR3365	33	65	L	S	54
A0101.001.0048	GAR4565	45	65	L	S	42
A0101.001.0049	GAR6565	65	65	L	S	30
A0101.001.0050	GAR2575	25	75	L	S	50
A0101.001.0088	GAR3575	35	75	L	S	36
A0101.001.0051	GAR5075	50	75	L	S	24
A0101.001.0052	GAR7575	75	75	L	S	16
A0101.001.0053	GAR10075	100	75	L	S	12
A0101.001.0054	GAR2580	25	80	LR	SR	50
A0101.001.0055	GAR3080	30	80	LR	SR	40
A0101.001.0056	GAR3580	35	80	LR	SR	36
A0101.001.0057	GAR4080	40	80	LR	SR	32
A0101.001.0058	GAR4580	45	80	LR	SR	28
A0101.001.0059	GAR5080	50	80	LR	SR	24
A0101.001.0060	GAR5580	55	80	LR	SR	24
A0101.001.0061	GAR6080	60	80	LR	SR	20
A0101.001.0062	GAR8080	80	80	LR	SR	16
A0101.001.0063	GAR10080	100	80	LR	SR	12
A0101.001.0064	GAR12080	120	80	LR	SR	10
A0101.001.0065	GAR14080	140	80	LR	SR	8
A0101.001.0066	GAR25100	25	100	LR	SR	50
A0101.001.0067	GAR33100	33	100	LR	SR	36
A0101.001.0068	GAR40100	40	100	LR	SR	28
A0101.001.0069	GAR48100	48	100	LR	SR	24
A0101.001.0070	GAR50100	50	100	LR	SR	24
A0101.001.0071	GAR60100	60	100	LR	SR	20
A0101.001.0072	GAR70100	70	100	LR	SR	16
A0101.001.0073	GAR75100	75	100	LR	SR	16
A0101.001.0074	GAR80100	80	100	LR	SR	16
A0101.001.0075	GAR100100	100	100	LR	SR	12
A0101.001.0076	GAR120100	120	100	LR	SR	8
A0101.001.0084	GAR130100	130	100	LR	SR	8
A0101.001.0081	GAR150100	150	100	LR	SR	8
A0101.001.0077	GAR160100	160	100	LR	SR	8
A0101.001.0082	GAR200100	200	100	LR	SR	6
A0101.001.0083	GAR300100	300	100	LR	SR	2
A0101.001.0099	GAR100150	100	150	LR	SR	8
A0101.001.0086	GAR200150	200	150	LR	SR	2
A0101.001.0087	GAR200200	200	200	LR	SR	2

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

## EASCO® EAR Type Wiring Duct (EAR型阻燃环保配线槽)


Materials: Lead-Free PVC.

Feature:





- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.






Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Middle (M)	Slot Narrow (H)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	宽齿 (L)	中齿 (M)	窄齿 (H)	包装数 (根)
A0101.002.0089	EAR1616	16	16	L	M	H	200
A0101.002.0090	EAR2516	25	16	L	M	H	120
A0101.002.0078	EAR1520	15	20	L	M	H	200
A0101.002.0001	EAR2020	20	20	L	M	H	116
A0101.002.0091	EAR4020	40	20	L	M	H	70
A0101.002.0002	EAR1525	15	25	L	M	H	150
A0101.002.0003	EAR2025	20	25	L	M	H	116
A0101.002.0004	EAR2525	25	25	L	M	H	90
A0101.002.0005	EAR3025	30	25	L	M	H	60
A0101.002.0006	EAR4025	40	25	L	M	H	60
A0101.002.0007	EAR5025	50	25	L	M	H	50
A0101.002.0092	EAR1530	15	30	L	M	H	100
A0101.002.0008	EAR2030	20	30	L	M	H	96
A0101.002.0009	EAR2530	25	30	L	M	H	72
A0101.002.0010	EAR3030	30	30	L	M	H	60
A0101.002.0011	EAR3530	35	30	L	M	H	56
A0101.002.0012	EAR4030	40	30	L	M	H	50
A0101.002.0013	EAR3333	33	33	L	M	H	56
A0101.002.0085	EAR2035	20	35	L	M	H	80
A0101.002.0014	EAR2535	25	35	L	M	H	72
A0101.002.0015	EAR3535	35	35	L	M	H	50
A0101.002.0016	EAR5035	50	35	L	M	H	50
A0101.002.0093	EAR2040	20	40	L	M	H	70
A0101.002.0017	EAR2540	25	40	L	M	H	60
A0101.002.0079	EAR3040	30	40	L	M	H	50
A0101.002.0080	EAR3540	35	40	L	M	H	50
A0101.002.0018	EAR4040	40	40	L	M	H	50
A0101.002.0019	EAR6040	60	40	L	M	H	40
A0101.002.0020	EAR8040	80	40	L	M	H	32
A0101.002.0094	EAR10040	100	40	L	M	H	18
A0101.002.0095	EAR12040	120	40	L	M	H	12
A0101.002.0021	EAR2545	25	45	L	M	H	54
A0101.002.0022	EAR3345	33	45	L	M	H	42
A0101.002.0023	EAR4545	45	45	L	M	H	46
A0101.002.0024	EAR6545	65	45	L	M	H	36
A0101.002.0025	EAR2550	25	50	L	M	H	50
A0101.002.0026	EAR3050	30	50	L	M	H	60
A0101.002.0027	EAR3550	35	50	L	M	H	54
A0101.002.0028	EAR4050	40	50	L	M	H	50
A0101.002.0029	EAR4550	45	50	L	M	H	40
A0101.002.0030	EAR5050	50	50	L	M	H	40
A0101.002.0031	EAR5550	55	50	L	M	H	40
A0101.002.0032	EAR6050	60	50	L	M	H	34
A0101.002.0096	EAR7550	75	50	L	M	H	24
A0101.002.0033	EAR8050	80	50	L	M	H	26
A0101.002.0034	EAR10050	100	50	L	M	H	20




- G = Gray
- W = White
- B = Black
- BL = Blue

\*The product is sold as a set of base and cover, No need to order another cover.


## EASCO® EAR Type Wiring Duct (EAR型阻燃环保配线槽)



Wide Slot (L)  
宽齿(L)



Middle Slot (M)  
中齿(M)



Narrow Slot (H)  
窄齿(H)



\*Catalog number must be completed by adding suffix L for wide slot, S for narrow slot, G for Gray, W for White, BL for Blue, B for Black.

Example: EAR5050LG" wide slot gray duct.

\*目录号必须添加后缀L(宽槽), S(窄槽), G(灰色), W(白色), BL(蓝色), B(黑色)。示例:EAR5050LG"宽槽灰色。

Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Middle (M)	Slot Narrow (H)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	宽齿 (L)	中齿 (M)	窄齿 (H)	包装数 (根)
A0101.002.0097	EAR2060	20	60	L	M	H	70
A0101.002.0035	EAR2560	25	60	L	M	H	66
A0101.002.0036	EAR3060	30	60	L	M	H	60
A0101.002.0037	EAR3560	35	60	L	M	H	50
A0101.002.0038	EAR4060	40	60	L	M	H	42
A0101.002.0039	EAR4560	45	60	L	M	H	42
A0101.002.0040	EAR5060	50	60	L	M	H	36
A0101.002.0041	EAR5560	55	60	L	M	H	36
A0101.002.0042	EAR6060	60	60	L	M	H	30
A0101.002.0043	EAR8060	80	60	L	M	H	22
A0101.002.0044	EAR10060	100	60	L	M	H	18
A0101.002.0098	EAR12060	120	60	L	M	H	16
A0101.002.0045	EAR7264	72	64	L	M	H	24
A0101.002.0046	EAR2565	25	65	L	M	H	60
A0101.002.0047	EAR3365	33	65	L	M	H	54
A0101.002.0048	EAR4565	45	65	L	M	H	42
A0101.002.0049	EAR6565	65	65	L	M	H	30
A0101.002.0050	EAR2575	25	75	L	M	H	50
A0101.002.0088	EAR3575	35	75	L	M	H	36
A0101.002.0051	EAR5075	50	75	L	M	H	24
A0101.002.0052	EAR7575	75	75	L	M	H	16
A0101.002.0053	EAR10075	100	75	L	M	H	12
A0101.002.0054	EAR2580	25	80	L	M	H	50
A0101.002.0055	EAR3080	30	80	L	M	H	40
A0101.002.0056	EAR3580	35	80	L	M	H	36
A0101.002.0057	EAR4080	40	80	L	M	H	32
A0101.002.0058	EAR4580	45	80	L	M	H	28
A0101.002.0059	EAR5080	50	80	L	M	H	24
A0101.002.0060	EAR5580	55	80	L	M	H	24
A0101.002.0061	EAR6080	60	80	L	M	H	20
A0101.002.0062	EAR8080	80	80	L	M	H	16
A0101.002.0063	EAR10080	100	80	L	M	H	12
A0101.002.0064	EAR12080	120	80	L	M	H	10
A0101.002.0065	EAR14080	140	80	L	M	H	8
A0101.002.0066	EAR25100	25	100	L	M	H	50
A0101.002.0067	EAR33100	33	100	L	M	H	36
A0101.002.0068	EAR40100	40	100	L	M	H	28
A0101.002.0069	EAR48100	48	100	L	M	H	24
A0101.002.0070	EAR50100	50	100	L	M	H	24
A0101.002.0071	EAR60100	60	100	L	M	H	20
A0101.002.0072	EAR70100	70	100	L	M	H	16
A0101.002.0073	EAR75100	75	100	L	M	H	16
A0101.002.0074	EAR80100	80	100	L	M	H	16
A0101.002.0075	EAR100100	100	100	L	M	H	12
A0101.002.0076	EAR120100	120	100	L	M	H	8
A0101.002.0084	EAR130100	130	100	L	M	H	8
A0101.002.0081	EAR150100	150	100	L	M	H	8
A0101.002.0077	EAR160100	160	100	L	M	H	8
A0101.002.0082	EAR200100	200	100	L	M	H	6
A0101.002.0083	EAR300100	300	100	L	M	H	2
A0101.002.0099	EAR100150	100	150	L	M	H	8
A0101.002.0086	EAR200150	200	150	L	M	H	2
A0101.002.0087	EAR200200	200	200	L	M	H	2

\*The product is sold as a set of base and cover.No need to order another cover.

\*本产品槽底槽盖整套出售,无需要外订购盖板。

## EASCO® WDCR Type Square Close Slot Wiring Duct (WDCR方孔闭口环保配线槽)




Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



Slot  
出线孔示意图






Article No.	Part No.	Wd. (W)	Ht. (H)	Finger Wd. (F)	Slot Wd. (E)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	齿宽 (F)	孔宽 (E)	包装数 (根)
A0101.003.0089	WDCR1616	16	16	8	6	200
A0101.003.0090	WDCR2516	25	16	8	6	120
A0101.003.0078	WDCR1520	15	20	8	6	200
A0101.003.0001	WDCR2020	20	20	8	6	116
A0101.003.0091	WDCR4020	40	20	8	6	70
A0101.003.0002	WDCR1525	15	25	8	6	150
A0101.003.0003	WDCR2025	20	25	8	6	116
A0101.003.0004	WDCR2525	25	25	8	6	90
A0101.003.0005	WDCR3025	30	25	8	6	60
A0101.003.0006	WDCR4025	40	25	8	6	60
A0101.003.0007	WDCR5025	50	25	8	6	50
A0101.003.0092	WDCR1530	15	30	11.5	8.5	100
A0101.003.0008	WDCR2030	20	30	11.5	8.5	96
A0101.003.0009	WDCR2530	25	30	11.5	8.5	72
A0101.003.0010	WDCR3030	30	30	11.5	8.5	60
A0101.003.0011	WDCR3530	35	30	11.5	8.5	56
A0101.003.0012	WDCR4030	40	30	11.5	8.5	50
A0101.003.0013	WDCR3333	33	33	11.5	8	56
A0101.003.0085	WDCR2035	20	35	11.5	8	80
A0101.003.0014	WDCR2535	25	35	11.5	8	72
A0101.003.0015	WDCR3535	35	35	11.5	8	50
A0101.003.0016	WDCR5035	50	35	11.5	8	50
A0101.003.0093	WDCR2040	20	40	11.5	8	70
A0101.003.0017	WDCR2540	25	40	11.5	8	60
A0101.003.0079	WDCR3040	30	40	11.5	8	50
A0101.003.0080	WDCR3540	35	40	11.5	8	50
A0101.003.0018	WDCR4040	40	40	11.5	8	50
A0101.003.0019	WDCR6040	60	40	11.5	8	40
A0101.003.0020	WDCR8040	80	40	11.5	8	32
A0101.003.0094	WDCR10040	100	40	11.5	8	18
A0101.003.0095	WDCR12040	120	40	11.5	8	12
A0101.003.0021	WDCR2545	25	45	11.5	8	54
A0101.003.0022	WDCR3345	33	45	11.5	8	42
A0101.003.0023	WDCR4545	45	45	11.5	8	46
A0101.003.0024	WDCR6545	65	45	11.5	8	36
A0101.003.0025	WDCR2550	25	50	11.5	8	50
A0101.003.0026	WDCR3050	30	50	11.5	8	60
A0101.003.0027	WDCR3550	35	50	11.5	8	54
A0101.003.0028	WDCR4050	40	50	11.5	8	50
A0101.003.0029	WDCR4550	45	50	11.5	8	40
A0101.003.0030	WDCR5050	50	50	11.5	8	40
A0101.003.0031	WDCR5550	55	50	11.5	8	40
A0101.003.0032	WDCR6050	60	50	11.5	8	34
A0101.003.0096	WDCR7550	75	50	11.5	8	24
A0101.003.0033	WDCR8050	80	50	11.5	8	26
A0101.003.0034	WDCR10050	100	50	11.5	8	20

\*Catalog number must be completed by adding suffix G for Gray, W for White, BL for Blue, B for Black.

Example: WDCR5050G.  
\*目录号必须添加后缀G (灰色), W(白色), BL(蓝色), B(黑色).  
示例:WDCR5050G.

\*The product is sold as a set of base and cover, No need to order another cover.

## UL® CE EASCO® WDCR Type Square Close Slot Wiring Duct (WDCR方孔闭口环保配线槽)



Slot  
出线孔示意图

Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Narrow (H)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	宽齿 (L)	窄齿 (H)	包装数 (根)
A0101.003.0097	WDCR2060	20	60	11	9	70
A0101.003.0035	WDCR2560	25	60	11	9	66
A0101.003.0036	WDCR3060	30	60	11	9	60
A0101.003.0037	WDCR3560	35	60	11	9	50
A0101.003.0038	WDCR4060	40	60	11	9	42
A0101.003.0039	WDCR4560	45	60	11	9	42
A0101.003.0040	WDCR5060	50	60	11	9	36
A0101.003.0041	WDCR5560	55	60	11	9	36
A0101.003.0042	WDCR6060	60	60	11	9	30
A0101.003.0043	WDCR8060	80	60	11	9	22
A0101.003.0044	WDCR10060	100	60	11	9	18
A0101.003.0098	WDCR12060	120	60	11	9	16
A0101.003.0045	WDCR7264	72	64	11	9	24
A0101.003.0046	WDCR2565	25	65	11	9	60
A0101.003.0047	WDCR3365	33	65	11	9	54
A0101.003.0048	WDCR4565	45	65	11	9	42
A0101.003.0049	WDCR6565	65	65	11	9	30
A0101.003.0050	WDCR2575	25	75	11	9	50
A0101.003.0088	WDCR3575	35	75	11	9	36
A0101.003.0051	WDCR5075	50	75	11	9	24
A0101.003.0052	WDCR7575	75	75	11	9	16
A0101.003.0053	WDCR10075	100	75	11	9	12
A0101.003.0054	WDCR2580	25	80	10	10	50
A0101.003.0055	WDCR3080	30	80	10	10	40
A0101.003.0056	WDCR3580	35	80	10	10	36
A0101.003.0057	WDCR4080	40	80	10	10	32
A0101.003.0058	WDCR4580	45	80	10	10	28
A0101.003.0059	WDCR5080	50	80	10	10	24
A0101.003.0060	WDCR5580	55	80	10	10	24
A0101.003.0061	WDCR6080	60	80	10	10	20
A0101.003.0062	WDCR8080	80	80	10	10	16
A0101.003.0063	WDCR10080	100	80	10	10	12
A0101.003.0064	WDCR12080	120	80	10	10	10
A0101.003.0065	WDCR14080	140	80	10	10	8
A0101.003.0066	WDCR25100	25	100	10	10	50
A0101.003.0067	WDCR33100	33	100	10	10	36
A0101.003.0068	WDCR40100	40	100	10	10	28
A0101.003.0069	WDCR48100	48	100	10	10	24
A0101.003.0070	WDCR50100	50	100	10	10	24
A0101.003.0071	WDCR60100	60	100	10	10	20
A0101.003.0072	WDCR70100	70	100	10	10	16
A0101.003.0073	WDCR75100	75	100	10	10	16
A0101.003.0074	WDCR80100	80	100	10	10	16
A0101.003.0075	WDCR100100	100	100	10	10	12
A0101.003.0076	WDCR120100	120	100	10	10	8
A0101.003.0084	WDCR130100	130	100	10	10	8
A0101.003.0081	WDCR150100	150	100	10	10	8
A0101.003.0077	WDCR160100	160	100	10	10	8
A0101.003.0082	WDCR200100	200	100	10	10	6
A0101.003.0083	WDCR300100	300	100	10	10	2
A0101.003.0099	WDCR100150	100	150	10	10	8
A0101.003.0086	WDCR200150	200	150	10	10	2
A0101.003.0087	WDCR200200	200	200	10	10	2

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

## ☺ EASCO® GR Type Wiring Ducts With Additional Holes (GR型多孔环保配线槽)




Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



Narrow Slot (SR)  
出线孔示意图

- G = Gray
- W = White
- B = Black
- BL = Blue

Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Narrow (SR)	Porous Size	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	窄齿 (SR)	多孔尺寸	包装数 (根)
A0101.035.0001	GR2560	25	60	SR	4x4.5	42
A0101.035.0002	GR3060	30	60	SR	4x4.5	60
A0101.035.0003	GR3560	35	60	SR	4x4.5	50
A0101.035.0004	GR4060	40	60	SR	4x4.5	42
A0101.035.0005	GR4560	45	60	SR	4x4.5	42
A0101.035.0006	GR5060	50	60	SR	4x4.5	36
A0101.035.0007	GR5560	55	60	SR	4x4.5	36
A0101.035.0008	GR6060	60	60	SR	4x4.5	30
A0101.035.0009	GR8060	80	60	SR	4x4.5	22
A0101.035.0010	GR10060	100	60	SR	4x4.5	18
A0101.035.0011	GR2580	25	80	SR	4x4.5	32
A0101.035.0012	GR3080	30	80	SR	4x4.5	40
A0101.035.0013	GR3580	35	80	SR	4x4.5	36
A0101.035.0014	GR4080	40	80	SR	4x4.5	32
A0101.035.0015	GR4580	45	80	SR	4x4.5	28
A0101.035.0016	GR5080	50	80	SR	4x4.5	24
A0101.035.0017	GR5580	55	80	SR	4x4.5	24
A0101.035.0018	GR6080	60	80	SR	4x4.5	20
A0101.035.0019	GR8080	80	80	SR	4x4.5	16
A0101.035.0020	GR10080	100	80	SR	4x4.5	12
A0101.035.0021	GR12080	120	80	SR	4x4.5	10
A0101.035.0022	GR14080	140	80	SR	4x4.5	8
A0101.035.0023	GR25100	25	100	SR	4x4.5	50
A0101.035.0024	GR33100	33	100	SR	4x4.5	36
A0101.035.0025	GR40100	40	100	SR	4x4.5	28
A0101.035.0026	GR48100	48	100	SR	4x4.5	24
A0101.035.0027	GR50100	50	100	SR	4x4.5	24
A0101.035.0028	GR60100	60	100	SR	4x4.5	20
A0101.035.0029	GR70100	70	100	SR	4x4.5	16
A0101.035.0030	GR75100	75	100	SR	4x4.5	16
A0101.035.0031	GR80100	80	100	SR	4x4.5	16
A0101.035.0032	GR100100	100	100	SR	4x4.5	12
A0101.035.0033	GR120100	120	100	SR	4x4.5	8
A0101.035.0034	GR160100	160	100	SR	4x4.5	8


\*The product is sold as a set of base and cover.No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix SR for narrow slot, G for Gray, W for White, BL for Blue, B for Black.

Example: GR5050SRG" narrow slot gray duct.

\*目录号必须添加后缀SR(窄槽), G(灰色), W(白色), BL(蓝色), B(黑色)。示例:GR5050SRG"窄槽灰色。



Ducting enables cabling to be introduced through the lateral perforations at the base of the ducting and used to fasten a sleeve between the bottom of the cabinet and the door or to clamp a cable coming from a distribution block, for example.

线槽下方孔洞, 在电缆穿过线槽时可用扎带固定, 使线缆不易脱落, 槽体更整洁。

## UL® CE EASCO® EHF Type Low Smoke Halogen Free Wiring Duct (EHF低烟无卤配线槽)



Materials: Low Smoke Halogen Free.

Feature:


- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -25°C to 90°C.
- EASCO offers a wide range of Wiring Ducts in materials that are compliant with the smoke generation and toxicity requirements of the EN 45545-2 European Railway Standards for fire safety classes R22 - R23 and Hazard Levels HL1 - HL2 - HL3.
- PC/ABS blend containing NO Bromide, NO Chlorine and NO Fluorine.

Standard Length: 2 meters


Color: Gray(RAL7035), Blue(RAL5015).



WxH



Wide Slot (L)  
宽齿 (L)



Narrow Slot (S)  
窄齿 (S)

G = Gray

BL = Blue

Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Narrow (S)	Pkg Qty (pcs)
货号	型号	宽 W	高 H	宽齿 L	窄齿 S	包装数 (根)
A0101.004.0001	EHF3535	35	35	L	S	50
A0101.004.0002	EHF2540	25	40	L	S	60
A0101.004.0003	EHF4040	40	40	L	S	50
A0101.004.0004	EHF6040	60	40	L	S	40
A0101.004.0005	EHF8040	80	40	L	S	32
A0101.004.0006	EHF3550	35	50	L	S	54
A0101.004.0007	EHF5050	50	50	L	S	40
A0101.004.0008	EHF8050	80	50	L	S	26
A0101.004.0010	EHF2560	25	60	L	S	42
A0101.004.0009	EHF3060	25	60	L	S	60
A0101.004.0011	EHF4060	40	60	L	S	42
A0101.004.0012	EHF6060	60	60	L	S	30
A0101.004.0013	EHF8060	80	60	L	S	22
A0101.004.0028	EHF12060	120	60	L	S	12
A0101.004.0026	EHF2580	25	80	L	S	50
A0101.004.0027	EHF3080	30	80	L	S	40
A0101.004.0014	EHF3580	35	80	L	S	36
A0101.004.0015	EHF4080	40	80	L	S	32
A0101.004.0029	EHF4580	45	80	L	S	28
A0101.004.0016	EHF5080	50	80	L	S	24
A0101.004.0017	EHF6080	60	80	L	S	20
A0101.004.0018	EHF8080	80	80	L	S	16
A0101.004.0019	EHF10080	100	80	L	S	12
A0101.004.0020	EHF12080	120	80	L	S	10
A0101.004.0030	EHF33100	33	100	L	S	36
A0101.004.0021	EHF40100	40	100	L	S	28
A0101.004.0022	EHF50100	50	100	L	S	24
A0101.004.0023	EHF60100	60	100	L	S	20
A0101.004.0024	EHF75100	70	100	L	S	16
A0101.004.0025	EHF100100	100	100	L	S	12

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix L for wide slot, S for narrow slot, G for Gray, BL for Blue.

Example: EHF5050LG" wide slot gray duct.

\*目录号必须添加后缀L(宽槽), S(窄槽), G(灰色), BL(蓝色)。示例: EHF5050LG"宽槽灰色。

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier



## EASCO® UHF Low Smoke Halogen Free Wiring Duct (UHF型低烟无卤配线槽)



Materials: Low Smoke Halogen Free.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -25°C to 90°C.
- EASCO offers a wide range of Wiring Ducts in materials that are compliant with the smoke generation and toxicity requirements of the EN 45545-2 European Railway Standards for fire safety classes R22 - R23 and Hazard Levels HL1 - HL2 - HL3.
- PC/ABS blend containing NO Bromide, NO Chlorine and NO Fluorine.

Standard Length: 2 meters

Color: Gray(RAL7035), Blue(RAL5015).

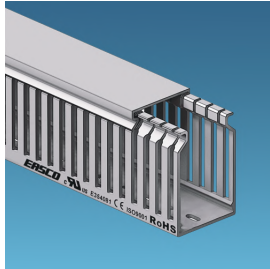

-  G = Gray
-  B = Black
-  BL = Blue

Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Middle (M)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	宽齿 (L)	中齿 (M)	包装数 (根)
A0101.005.0001	UHF2525	25	25	L	M	90
A0101.005.0002	UHF37.5/37.5	37.5	37.5	L	M	50
A0101.005.0003	UHF2550	25	50	L	MR	50
A0101.005.0004	UHF37.5/50	37.5	50	L	MR	60
A0101.005.0005	UHF5050	50	50	L	MR	40
A0101.005.0006	UHF7550	75	50	L	MR	24
A0101.005.0007	UHF10050	100	50	L	MR	20
A0101.005.0008	UHF2575	25	75	L	MR	50
A0101.005.0009	UHF37.5/75	37.5	75	L	MR	28
A0101.005.0010	UHF5075	50	75	L	MR	24
A0101.005.0011	UHF7575	75	75	L	MR	16
A0101.005.0012	UHF10075	100	75	L	MR	12
A0101.005.0013	UHF50/37.5	50	37.5	L	M	40

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix L for wide slot, S for narrow slot, G for Gray, BL for Blue.

Example: UHF5050LG "wide slot gray duct."

\*目录号必须添加后缀L(宽槽), S(窄槽), G(灰色), BL(蓝色)。示例: UHF5050LG "宽槽灰色。"

## UL® CE EASCO® SDRHF Type Halogen Free Solid Wiring Ducts (SDRHF耐高温无卤线槽)


Materials: Low Smoke Halogen Free.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -25°C to 90°C.
- EASCO offers a wide range of Wiring Ducts in materials that are compliant with the smoke generation and toxicity requirements of the EN 45545-2 European Railway Standards for fire safety classes R22 - R23 and Hazard Levels HL1 - HL2 - HL3.
- PC/ABS blend containing NO Bromide, NO Chlorine and NO Fluorine.

Standard Length: 2 meters

Color: Gray(RAL7035), Blue(RAL5015).



WxH



Side View  
侧视图

■ G = Gray

■ BL = Blue

Article No.	Part No.	Wd. (W)	Ht. (H)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	包装数 (根)
A0101.036.0001	SDR3535HF	35	35	50
A0101.036.0002	SDR2540HF	25	40	60
A0101.036.0003	SDR4040HF	40	40	50
A0101.036.0004	SDR6040HF	60	40	40
A0101.036.0005	SDR8040HF	80	40	32
A0101.036.0006	SDR3550HF	35	50	54
A0101.036.0007	SDR5050HF	50	50	40
A0101.036.0008	SDR8050HF	80	50	26
A0101.036.0009	SDR2560HF	25	60	42
A0101.036.0010	SDR3060HF	30	60	60
A0101.036.0011	SDR4060HF	40	60	42
A0101.036.0012	SDR6060HF	60	60	30
A0101.036.0013	SDR8060HF	80	60	22
A0101.036.0014	SDR2580HF	25	80	50
A0101.036.0015	SDR3080HF	30	80	40
A0101.036.0016	SDR3580HF	35	80	36
A0101.036.0017	SDR4080HF	40	80	32
A0101.036.0018	SDR5080HF	50	80	24
A0101.036.0019	SDR6080HF	60	80	20
A0101.036.0020	SDR8080HF	80	80	16
A0101.036.0021	SDR10080HF	100	80	12
A0101.036.0022	SDR12080HF	120	80	10
A0101.036.0023	SDR40100HF	40	100	28
A0101.036.0024	SDR50100HF	50	100	24
A0101.036.0025	SDR60100HF	60	100	20
A0101.036.0026	SDR75100HF	70	100	16
A0101.036.0027	SDR100100HF	100	100	12
A0101.036.0028	SDR2525HF	25	25	90
A0101.036.0029	SDR37.5/37.5HF	37.5	37.5	50
A0101.036.0030	SDR2550HF	25	50	50
A0101.036.0031	SDR37.5/50HF	37.5	50	60
A0101.036.0032	SDR5050HF	50	50	40
A0101.036.0033	SDR7550HF	75	50	24
A0101.036.0034	SDR10050HF	100	50	20
A0101.036.0035	SDR2575HF	25	75	50
A0101.036.0036	SDR3575HF	35	75	28
A0101.036.0037	SDR5075HF	50	75	24
A0101.036.0038	SDR7575HF	75	75	16
A0101.036.0039	SDR10075HF	100	75	12
A0101.036.0040	SDR50/37.5HF	50	37.5	40

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix G for Gray, BL for Blue.

Example: SDR5050HFG.

\*目录号必须添加后缀G (灰色), BL (蓝色)。示例: SDR5050HFG。

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

## ☺ EASCO® SCR Type Wiring Duct With Scoreline (SCR型带线阻燃环保配线槽)




Materials: Lead-Free PVC.

Feature:


- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters


Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



Wide Slot (L)  
宽齿(L)



Middle Slot (M)  
中齿(M)



Narrow Slot (S)  
窄齿(S)





Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Middle (M)	Slot Narrow (S)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	宽齿 (L)	中齿 (M)	窄齿 (S)	包装数 (根)
A0101.006.0001	SCR1520	15	20			S	150
A0101.006.0002	SCR2525	25	25			S	90
A0101.006.0003	SCR1530	15	30			S	50
A0101.006.0004	SCR2030	20	30			S	96
A0101.006.0005	SCR2530	25	30			S	72
A0101.006.0006	SCR3030	30	30			S	60
A0101.006.0007	SCR3530	35	30			S	56
A0101.006.0008	SCR2535	25	35			S	72
A0101.006.0009	SCR3535	35	35			S	50
A0101.006.0010	SCR5035	50	35			S	50
A0101.006.0011	SCR2540	25	40		M	S	60
A0101.006.0012	SCR4040	40	40		M	S	50
A0101.006.0013	SCR6040	60	40		M	S	40
A0101.006.0014	SCR3345	33	45		M	S	42
A0101.006.0015	SCR4545	45	45		M	S	46
A0101.006.0016	SCR2550	25	50		M	S	50
A0101.006.0017	SCR3550	35	50		M	S	54
A0101.006.0018	SCR4550	45	50		M	S	40
A0101.006.0019	SCR5050	50	50		M	S	40
A0101.006.0020	SCR5550	55	50		M	S	40
A0101.006.0021	SCR6050	60	50		M	S	34
A0101.006.0022	SCR8050	80	50		M	S	26
A0101.006.0023	SCR2560	25	60	L	M	S	42
A0101.006.0024	SCR4060	40	60	L	M	S	42
A0101.006.0025	SCR5060	50	60	L	M	S	36
A0101.006.0026	SCR5560	55	60	L	M	S	36
A0101.006.0027	SCR6060	60	60	L	M	S	30
A0101.006.0028	SCR8060	80	60	L	M	S	22
A0101.006.0029	SCR3365	33	65	L		S	28
A0101.006.0030	SCR4565	45	65	L		S	42
A0101.006.0031	SCR6565	65	65	L		S	30
A0101.006.0032	SCR2580	25	80	L		S	32
A0101.006.0033	SCR3580	35	80	L		S	36
A0101.006.0034	SCR4080	40	80	L		S	32
A0101.006.0035	SCR4580	45	80	L		S	28
A0101.006.0036	SCR5080	50	80	L		S	24
A0101.006.0037	SCR6080	60	80	L		S	20
A0101.006.0038	SCR8080	80	80	L		S	16
A0101.006.0039	SCR10080	100	80	L		S	12
A0101.006.0040	SCR12080	120	80	L		S	10


\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

## CE EASCO® SCR Type Wiring Duct With Scoreline (SCR型带线阻燃环保配线槽)



Wide Slot (L)  
宽齿(L)



Narrow Slot (S)  
窄齿(S)

- G = Gray
- W = White
- B = Black
- BL = Blue

Article No.	Part No.	Wd. (W)	Ht. (H)	Slot Wide (L)	Slot Middle (M)	Slot Narrow (S)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	宽齿 (L)	中齿 (M)	窄齿 (S)	包装数 (根)
A0101.006.0041	SCR25100	25	100	L		S	50
A0101.006.0042	SCR33100	33	100	L		S	36
A0101.006.0043	SCR35100	35	100	L		S	36
A0101.006.0044	SCR40100	40	100	L		S	28
A0101.006.0045	SCR50100	50	100	L		S	24
A0101.006.0046	SCR60100	60	100	L		S	20
A0101.006.0047	SCR80100	80	100	L		S	16
A0101.006.0048	SCR100100	100	100	L		S	12
A0101.006.0049	SCR120100	120	100	L		S	8
A0101.006.0050	SCR140100	140	100	L		S	8


\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix L for wide slot, S for narrow slot, G for Gray, W for White, BL for Blue, B for Black.

Example: SCR5050LG" wide slot gray duct.

\*目录号必须添加后缀L(宽槽), S(窄槽), G(灰色), W(白色), BL(蓝色), B(黑色)。示例: SCR5050LG"宽槽灰色。



If using the cover as support for identification, the ridges on the edge can be used to align the labels.

线槽盖上的脊可以使标签粘贴的更加整齐美观。

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

## EASCO® GARZ Type Wiring Duct (Finger Breakable) (GARZ型易折断配线槽)





Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



Narrow Slot (S)  
窄齿(S)

- G = Gray
- W = White
- B = Black
- BL = Blue



Article No.	Part No.	Wd. (W)	Ht. (W)	Slot Wide (L)	Slot Narrow (S)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (W)	宽齿 (L)	窄齿 (S)	包装数 (根)
A0101.007.0001	GARZ2525	25	25	L	S	90
A0101.007.0002	GARZ3025	30	25	L	S	60
A0101.007.0003	GARZ4025	40	25	L	S	60
A0101.007.0004	GARZ5025	50	25	L	S	50
A0101.007.0005	GARZ2030	20	30	L	S	96
A0101.007.0006	GARZ2530	25	30	L	S	72
A0101.007.0007	GARZ3030	30	30	L	S	60
A0101.007.0008	GARZ3530	35	30	L	S	56
A0101.007.0009	GARZ4030	40	30	L	S	50
A0101.007.0010	GARZ3333	33	33	L	S	56
A0101.007.0011	GARZ2535	25	35	L	S	72
A0101.007.0012	GARZ3535	35	35	L	S	50
A0101.007.0013	GARZ5035	50	35	L	S	50
A0101.007.0014	GARZ2540	25	40	L	S	60
A0101.007.0015	GARZ4040	40	40	L	S	50
A0101.007.0016	GARZ6040	60	40	L	S	40
A0101.007.0017	GARZ8040	80	40	L	S	32
A0101.007.0018	GARZ2545	25	45	L	S	54
A0101.007.0019	GARZ3345	33	45	L	S	42
A0101.007.0020	GARZ4545	45	45	L	S	46
A0101.007.0021	GARZ6545	65	45	L	S	36
A0101.007.0022	GARZ2550	25	50	L	S	50
A0101.007.0023	GARZ3050	30	50	L	S	60
A0101.007.0024	GARZ3550	35	50	L	S	54
A0101.007.0025	GARZ4050	40	50	L	S	50
A0101.007.0026	GARZ4550	45	50	L	S	40
A0101.007.0027	GARZ5050	50	50	L	S	40
A0101.007.0028	GARZ5550	55	50	L	S	40
A0101.007.0029	GARZ6050	60	50	L	S	34
A0101.007.0030	GARZ8050	80	50	L	S	26
A0101.007.0031	GARZ10050	100	50	L	S	20
A0101.007.0032	GARZ2560	25	60	L	S	42
A0101.007.0033	GARZ3060	30	60	L	S	60
A0101.007.0034	GARZ3560	35	60	L	S	50
A0101.007.0035	GARZ4060	40	60	L	S	42
A0101.007.0036	GARZ4560	45	60	L	S	42
A0101.007.0037	GARZ5060	50	60	L	S	36
A0101.007.0038	GARZ5560	55	60	L	S	36
A0101.007.0039	GARZ6060	60	60	L	S	30
A0101.007.0040	GARZ8060	80	60	L	S	22
A0101.007.0041	GARZ10060	100	60	L	S	18
A0101.007.0042	GARZ7264	72	64	L	S	24
A0101.007.0043	GARZ2565	25	65	L	S	40
A0101.007.0044	GARZ3365	33	65	L	S	28
A0101.007.0045	GARZ4565	45	65	L	S	42
A0101.007.0046	GARZ6565	65	65	L	S	30

\*Catalog number must be completed by adding suffix L for wide slot, S for narrow slot, G for Gray, W for White, BL for Blue, B for Black.  
Example: GAR5050LG" wide slot gray duct.


\*目录号必须添加后缀L(宽槽), S(窄槽), G(灰色), W(白色), BL(蓝色), B(黑色)。示例:GAR5050LG"宽槽灰色。

\*The product is sold as a set of base and cover, No need to order another cover.


## UL® CE EASCO® GARZ Type Wiring Duct (Finger Breakable) (GARZ型易折断配线槽)




WxH




Wide Slot (L)  
宽齿(L)



Narrow Slot (S)  
窄齿(S)



Wide Slot (LR)  
宽齿(LR)



Narrow Slot (LR)  
窄齿(LR)

Article No.	Part No.	Wd. (W)	Ht. (W)	Slot Wide (L)	Slot Narrow (H)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (W)	宽齿 (L)	窄齿 (H)	包装数 (根)
A0101.007.0047	GARZ2575	25	75	L	S	50
A0101.007.0048	GARZ5075	50	75	L	S	24
A0101.007.0049	GARZ7575	75	75	L	S	16
A0101.007.0050	GARZ10075	100	75	L	S	12
A0101.007.0051	GARZ2580	25	80	LR	SR	32
A0101.007.0052	GARZ3080	30	80	LR	SR	40
A0101.007.0053	GARZ3580	35	80	LR	SR	36
A0101.007.0054	GARZ4080	40	80	LR	SR	32
A0101.007.0055	GARZ4580	45	80	LR	SR	28
A0101.007.0056	GARZ5080	50	80	LR	SR	24
A0101.007.0057	GARZ5580	55	80	LR	SR	24
A0101.007.0058	GARZ6080	60	80	LR	SR	20
A0101.007.0059	GARZ8080	80	80	LR	SR	16
A0101.007.0060	GARZ10080	100	80	LR	SR	12
A0101.007.0061	GARZ12080	120	80	LR	SR	10
A0101.007.0062	GARZ14080	140	80	LR	SR	8
A0101.007.0063	GARZ25100	25	100	LR	SR	50
A0101.007.0064	GARZ33100	33	100	LR	SR	36
A0101.007.0065	GARZ40100	40	100	LR	SR	28
A0101.007.0066	GARZ48100	48	100	LR	SR	24
A0101.007.0067	GARZ50100	50	100	LR	SR	24
A0101.007.0068	GARZ60100	60	100	LR	SR	20
A0101.007.0069	GARZ70100	70	100	LR	SR	16
A0101.007.0070	GARZ75100	75	100	LR	SR	16
A0101.007.0071	GARZ80100	80	100	LR	SR	16
A0101.007.0072	GARZ100100	100	100	LR	SR	12
A0101.007.0073	GARZ120100	120	100	LR	SR	8
A0101.007.0074	GARZ160100	160	100	LR	SR	8

\*The product is sold as a set of base and cover.No need to order another cover.

\*本产品槽底槽盖整套出售,无需额外订购盖板。

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

## UL® CE EASCO® SDR Type Solid Wiring Duct (SDR型密封阻燃环保配线槽)



Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.

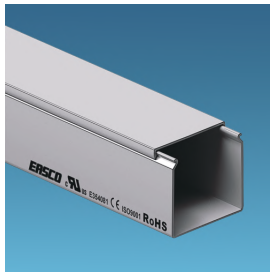

Side View  
侧视图




Article No.	Part No.	Wd. (W)	Ht. (H)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	包装数 (根)
A0101.008.0089	SDR1616	16	16	200
A0101.008.0090	SDR2516	25	16	120
A0101.008.0078	SDR1520	15	20	200
A0101.008.0001	SDR2020	20	20	116
A0101.008.0091	SDR4020	40	20	70
A0101.008.0002	SDR1525	15	25	150
A0101.008.0003	SDR2025	20	25	116
A0101.008.0004	SDR2525	25	25	90
A0101.008.0005	SDR3025	30	25	60
A0101.008.0006	SDR4025	40	25	60
A0101.008.0007	SDR5025	50	25	50
A0101.008.0092	SDR1530	15	30	100
A0101.008.0008	SDR2030	20	30	96
A0101.008.0009	SDR2530	25	30	72
A0101.008.0010	SDR3030	30	30	60
A0101.008.0011	SDR3530	35	30	56
A0101.008.0012	SDR4030	40	30	50
A0101.008.0013	SDR3333	33	33	56
A0101.008.0085	SDR2035	20	35	80
A0101.008.0014	SDR2535	25	35	72
A0101.008.0015	SDR3535	35	35	50
A0101.008.0016	SDR5035	50	35	50
A0101.008.0093	SDR2040	20	40	70
A0101.008.0017	SDR2540	25	40	60
A0101.008.0079	SDR3040	30	40	50
A0101.008.0080	SDR3540	35	40	50
A0101.008.0018	SDR4040	40	40	50
A0101.008.0019	SDR6040	60	40	40
A0101.008.0020	SDR8040	80	40	32
A0101.008.0094	SDR10040	100	40	18
A0101.008.0095	SDR12040	120	40	12
A0101.008.0021	SDR2545	25	45	54
A0101.008.0022	SDR3345	33	45	42
A0101.008.0023	SDR4545	45	45	46
A0101.008.0024	SDR6545	65	45	36
A0101.008.0025	SDR2550	25	50	50
A0101.008.0026	SDR3050	30	50	60
A0101.008.0027	SDR3550	35	50	54
A0101.008.0028	SDR4050	40	50	50
A0101.008.0029	SDR4550	45	50	40
A0101.008.0030	SDR5050	50	50	40
A0101.008.0031	SDR5550	55	50	40
A0101.008.0032	SDR6050	60	50	34
A0101.008.0096	SDR7550	75	50	24
A0101.008.0033	SDR8050	80	50	26
A0101.008.0034	SDR10050	100	50	20

\*Catalog number must be completed by adding suffix G for Gray, W for White, BL for Blue, B for Black. Example: SDR5050G

\*目录号必须添加后缀G (灰色), W (白色), BL (蓝色), B (黑色). 示例: SDR5050G.

\*The product is sold as a set of base and cover, No need to order another cover.

## UL® CE EASCO® SDR Type Solid Wiring Duct (SDR型密封阻燃环保配线槽)



Side View  
侧视图

Article No.	Part No.	Wd. (W)	Ht. (H)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	包装数 (根)
A0101.008.0097	SDR2060	20	60	70
A0101.008.0035	SDR2560	25	60	66
A0101.008.0036	SDR3060	30	60	60
A0101.008.0037	SDR3560	35	60	50
A0101.008.0038	SDR4060	40	60	42
A0101.008.0039	SDR4560	45	60	42
A0101.008.0040	SDR5060	50	60	36
A0101.008.0041	SDR5560	55	60	36
A0101.008.0042	SDR6060	60	60	30
A0101.008.0043	SDR8060	80	60	22
A0101.008.0044	SDR10060	100	60	18
A0101.008.0098	SDR12060	120	60	16
A0101.008.0045	SDR7264	72	64	24
A0101.008.0046	SDR2565	25	65	60
A0101.008.0047	SDR3365	33	65	54
A0101.008.0048	SDR4565	45	65	42
A0101.008.0049	SDR6565	65	65	30
A0101.008.0050	SDR2575	25	75	50
A0101.008.0088	SDR3575	35	75	36
A0101.008.0051	SDR5075	50	75	24
A0101.008.0052	SDR7575	75	75	16
A0101.008.0053	SDR10075	100	75	12
A0101.008.0054	SDR2580	25	80	50
A0101.008.0055	SDR3080	30	80	40
A0101.008.0056	SDR3580	35	80	36
A0101.008.0057	SDR4080	40	80	32
A0101.008.0058	SDR4580	45	80	28
A0101.008.0059	SDR5080	50	80	24
A0101.008.0060	SDR5580	55	80	24
A0101.008.0061	SDR6080	60	80	20
A0101.008.0062	SDR8080	80	80	16
A0101.008.0063	SDR10080	100	80	12
A0101.008.0064	SDR12080	120	80	10
A0101.008.0065	SDR14080	140	80	8
A0101.008.0066	SDR25100	25	100	50
A0101.008.0067	SDR33100	33	100	36
A0101.008.0068	SDR40100	40	100	28
A0101.008.0069	SDR48100	48	100	24
A0101.008.0070	SDR50100	50	100	24
A0101.008.0071	SDR60100	60	100	20
A0101.008.0072	SDR70100	70	100	16
A0101.008.0073	SDR75100	75	100	16
A0101.008.0074	SDR80100	80	100	16
A0101.008.0075	SDR100100	100	100	12
A0101.008.0076	SDR120100	120	100	8
A0101.008.0084	SDR130100	130	100	8
A0101.008.0081	SDR150100	150	100	8
A0101.008.0077	SDR160100	160	100	8
A0101.008.0082	SDR200100	200	100	6
A0101.008.0083	SDR300100	300	100	2
A0101.008.0099	SDR100150	100	150	8
A0101.008.0086	SDR200150	200	150	2
A0101.008.0087	SDR200200	200	200	2

\*The product is sold as a set of base and cover, No need to order another cover.  
\*本产品槽底槽盖整套出售, 无需额外订购盖板。

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier



## CE EASCO® GDR Type Wiring Duct (GDR型阻燃环保配线槽)



Materials: Lead-Free PVC.

Feature:


- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters


Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.




WxH



F1(4.5mmx5.5mm)



F2(4.5mmx5.5mm)



F3(6mmx6mm)



- G = Gray
- W = White
- B = Black
- BL = Blue

Article No.	Part No.	Wd. (W)	Ht. (H)	Finger Wd (F)	Slot Wd (E)	Seperation	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	齿宽 (F)	孔宽 (E)	隔离位	包装数 (根)
A0101.009.0001	GDR2550	25	50	5.5	4.5	F1	50
A0101.009.0002	GDR3050	30	50	5.5	4.5	F1	60
A0101.009.0003	GDR3550	35	50	5.5	4.5	F1	54
A0101.009.0004	GDR4050	40	50	5.5	4.5	F1	50
A0101.009.0005	GDR4550	45	50	5.5	4.5	F1	40
A0101.009.0006	GDR5050	50	50	5.5	4.5	F1	40
A0101.009.0007	GDR5550	55	50	5.5	4.5	F1	40
A0101.009.0008	GDR6050	60	50	5.5	4.5	F1	34
A0101.009.0009	GDR8050	80	50	5.5	4.5	F1	26
A0101.009.0010	GDR10050	100	50	5.5	4.5	F1	20
A0101.009.0011	GDR2560	25	60	5.5	4.5	F1	42
A0101.009.0012	GDR3060	30	60	5.5	4.5	F1	60
A0101.009.0013	GDR3560	35	60	5.5	4.5	F1	50
A0101.009.0014	GDR4060	40	60	5.5	4.5	F1	42
A0101.009.0015	GDR4560	45	60	5.5	4.5	F1	42
A0101.009.0016	GDR5060	50	60	5.5	4.5	F1	36
A0101.009.0017	GDR5560	55	60	5.5	4.5	F1	36
A0101.009.0018	GDR6060	60	60	5.5	4.5	F1	30
A0101.009.0019	GDR8060	80	60	5.5	4.5	F1	22
A0101.009.0020	GDR10060	100	60	5.5	4.5	F1	18
A0101.009.0021	GDR2580	25	80	5.5	4.5	F2	32
A0101.009.0022	GDR3080	30	80	5.5	4.5	F2	40
A0101.009.0023	GDR3580	35	80	5.5	4.5	F2	36
A0101.009.0024	GDR4080	40	80	5.5	4.5	F2	32
A0101.009.0025	GDR4580	45	80	5.5	4.5	F2	28
A0101.009.0026	GDR5080	50	80	5.5	4.5	F2	24
A0101.009.0027	GDR5580	55	80	5.5	4.5	F2	24
A0101.009.0028	GDR6080	60	80	5.5	4.5	F2	20
A0101.009.0029	GDR8080	80	80	5.5	4.5	F2	16
A0101.009.0030	GDR10080	100	80	5.5	4.5	F2	12
A0101.009.0031	GDR12080	120	80	5.5	4.5	F2	10
A0101.009.0032	GDR14080	140	80	5.5	4.5	F2	8
A0101.009.0033	GDR25100	25	100	5.5	4.5	F2	50
A0101.009.0034	GDR33100	33	100	5.5	4.5	F2	36
A0101.009.0035	GDR40100	40	100	5.5	4.5	F2	28
A0101.009.0036	GDR48100	48	100	5.5	4.5	F2	24
A0101.009.0037	GDR50100	50	100	5.5	4.5	F2	24
A0101.009.0038	GDR60100	60	100	5.5	4.5	F2	20
A0101.009.0039	GDR70100	70	100	5.5	4.5	F2	16
A0101.009.0040	GDR75100	75	100	5.5	4.5	F2	16
A0101.009.0041	GDR80100	80	100	5.5	4.5	F2	16
A0101.009.0042	GDR100100	100	100	5.5	4.5	F2	12
A0101.009.0043	GDR120100	120	100	5.5	4.5	F2	8
A0101.009.0044	GDR160100	160	100	5.5	4.5	F2	8


\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

## CE EASCO® GDR Type Wiring Duct (GDR型阻燃环保配线槽)



WxH



F3(6mmx6mm)

Article No.	Part No.	Wd. (W)	Ht. (H)	Finger Wd (F)	Slot Wd (E)	Seperation	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	齿宽 (F)	孔宽 (E)	隔离位	包装数 (根)
A0101.009.0045	GDR2580M	25	80	6	6	F3	32
A0101.009.0046	GDR3080M	30	80	6	6	F3	40
A0101.009.0047	GDR3580M	35	80	6	6	F3	36
A0101.009.0048	GDR4080M	40	80	6	6	F3	32
A0101.009.0049	GDR4580M	45	80	6	6	F3	28
A0101.009.0050	GDR5080M	50	80	6	6	F3	24
A0101.009.0051	GDR5580M	55	80	6	6	F3	24
A0101.009.0052	GDR6080M	60	80	6	6	F3	20
A0101.009.0053	GDR8080M	80	80	6	6	F3	16
A0101.009.0054	GDR10080M	100	80	6	6	F3	12
A0101.009.0055	GDR12080M	120	80	6	6	F3	10
A0101.009.0056	GDR14080M	140	80	6	6	F3	8
A0101.009.0057	GDR25100M	25	100	6	6	F3	50
A0101.009.0058	GDR33100M	33	100	6	6	F3	36
A0101.009.0059	GDR40100M	40	100	6	6	F3	28
A0101.009.0060	GDR48100M	48	100	6	6	F3	24
A0101.009.0061	GDR50100M	50	100	6	6	F3	24
A0101.009.0062	GDR60100M	60	100	6	6	F3	20
A0101.009.0063	GDR70100M	70	100	6	6	F3	16
A0101.009.0064	GDR75100M	75	100	6	6	F3	16
A0101.009.0065	GDR80100M	80	100	6	6	F3	16
A0101.009.0066	GDR100100M	100	100	6	6	F3	12
A0101.009.0067	GDR120100M	120	100	6	6	F3	8
A0101.009.0068	GDR160100M	160	100	6	6	F3	8

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix F1, F2, F3, G for Gray, W for White, BL for Blue, B for Black.

Example: GDR5050F1G.

\*目录号必须添加后缀F1、F2、F3、G (灰色), W(白色), BL(蓝色), B(黑色)。示例:GR5050F1G。

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

A1. Wiring Ducts

## CE EASCO® GER Type Wiring Duct (GER型阻燃环保配线槽)

A2. Cable Ties

Materials: Lead-Free PVC.

Feature:


- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

A3. Din Rails

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.

A4. Cable Markers




A5. Cable Clamps


A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland



A9. Plastic Flexible Conduit



A10. Metal Flexible Conduit

A11. Terminal

GER Wide Slot L (宽齿L)

- G = Gray
- W = White
- B = Black
- BL = Blue

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

Article No.	Part No.	Wd. (W)	Ht. (H)	Seperation	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	隔离位	包装数 (根)
A0101.010.0001	GER2580	25	80	L	32
A0101.010.0002	GER3080	30	80	L	40
A0101.010.0003	GER3580	35	80	L	36
A0101.010.0004	GER4080	40	80	L	32
A0101.010.0005	GER4580	45	80	L	28
A0101.010.0006	GER5080	50	80	L	24
A0101.010.0007	GER5580	55	80	L	24
A0101.010.0008	GER6080	60	80	L	20
A0101.010.0009	GER8080	80	80	L	16
A0101.010.0010	GER10080	100	80	L	12
A0101.010.0011	GER12080	120	80	L	10
A0101.010.0012	GER14080	140	80	L	8
A0101.010.0013	GER25100	25	100	L	50
A0101.010.0014	GER33100	33	100	L	36
A0101.010.0015	GER40100	40	100	L	28
A0101.010.0016	GER48100	48	100	L	24
A0101.010.0017	GER50100	50	100	L	24
A0101.010.0018	GER60100	60	100	L	20
A0101.010.0019	GER70100	70	100	L	16
A0101.010.0020	GER75100	75	100	L	16
A0101.010.0021	GER80100	80	100	L	16
A0101.010.0022	GER100100	100	100	L	12
A0101.010.0023	GER120100	120	100	L	8
A0101.010.0024	GER160100	160	100	L	8

\*The product is sold as a set of base and cover, No need to order another cover.  
 \*本产品槽底槽盖整套出售, 无需额外订购盖板。  
 \*Catalog number must be completed by adding suffix L for wide slot, G for Gray, W for White, BL for Blue, B for Black.  
 Example: GER2580LG" wide slot gray duct.  
 \*目录号必须添加后缀L(宽槽), G (灰色), W(白色), BL(蓝色), B(黑色)。示例: GER2580LG"宽槽灰色。

## ☺ EASCO® LDCR Type Square Close Slot Wiring Duct (LDCR方孔闭口环保配线槽)



Materials: Lead-Free PVC.

Feature:


- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



WxH



LDCR Slot  
出线孔示意图

- G = Gray
- W = White
- B = Black
- BL = Blue

Article No.	Part No.	Wd. (W)	Ht. (H)	Finger Wd. (F)	Slot Wd. (E)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	齿宽 (F)	孔宽 (E)	包装数 (根)
A0101.011.0001	LDCR2560	25	60	8	17	42
A0101.011.0002	LDCR3060	30	60	8	17	60
A0101.011.0003	LDCR3560	35	60	8	17	50
A0101.011.0004	LDCR4060	40	60	8	17	42
A0101.011.0005	LDCR4560	45	60	8	17	42
A0101.011.0006	LDCR5060	50	60	8	17	36
A0101.011.0007	LDCR5560	55	60	8	17	36
A0101.011.0008	LDCR6060	60	60	8	17	30
A0101.011.0009	LDCR8060	80	60	8	17	22
A0101.011.0010	LDCR10060	100	60	8	17	18
A0101.011.0011	LDCR2580	25	80	8	17	32
A0101.011.0012	LDCR3080	30	80	8	17	40
A0101.011.0013	LDCR3580	35	80	8	17	36
A0101.011.0014	LDCR4080	40	80	8	17	32
A0101.011.0015	LDCR4580	45	80	8	17	28
A0101.011.0016	LDCR5080	50	80	8	17	24
A0101.011.0017	LDCR5580	55	80	8	17	24
A0101.011.0018	LDCR6080	60	80	8	17	20
A0101.011.0019	LDCR8080	80	80	8	17	16
A0101.011.0020	LDCR10080	100	80	8	17	12
A0101.011.0021	LDCR12080	120	80	8	17	10
A0101.011.0022	LDCR14080	140	80	8	17	8
A0101.011.0023	LDCR25100	25	100	8	17	50
A0101.011.0024	LDCR33100	33	100	8	17	36
A0101.011.0025	LDCR40100	40	100	8	17	28
A0101.011.0026	LDCR48100	48	100	8	17	24
A0101.011.0027	LDCR50100	50	100	8	17	24
A0101.011.0028	LDCR60100	60	100	8	17	20
A0101.011.0029	LDCR70100	70	100	8	17	16
A0101.011.0030	LDCR75100	75	100	8	17	16
A0101.011.0031	LDCR80100	80	100	8	17	16
A0101.011.0032	LDCR100100	100	100	8	17	12
A0101.011.0033	LDCR120100	120	100	8	17	8
A0101.011.0034	LDCR160100	160	100	8	17	8

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix G for Gray, W for White, BL for Blue, B for Black.  
Example: LDCR3060G.

\*目录号必须添加后缀G (灰色), W (白色), BL (蓝色), B (黑色)。示例: LDCR3060G。

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

## ☺ EASCO® VDCR Type Round Close Slot Wiring Duct (VDCR圆孔闭口环保配线槽)




Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



VDCR Slot  
出线孔示意图





Article No.	Part No.	Wd. (W)	Ht. (H)	Finger Wd. (F)	Slot Wd. (E)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	齿宽 (F)	孔宽 (E)	包装数 (根)
A0101.012.0001	VDCR2525	25	25	8	6	90
A0101.012.0002	VDCR3025	30	25	8	6	60
A0101.012.0003	VDCR4025	40	25	8	6	60
A0101.012.0004	VDCR5025	50	25	8	6	50
A0101.012.0005	VDCR2530	25	30	8	6	72
A0101.012.0006	VDCR3030	30	30	8	6	60
A0101.012.0007	VDCR3530	35	30	8	6	56
A0101.012.0008	VDCR4030	40	30	8	6	50
A0101.012.0009	VDCR3333	33	33	8	6	56
A0101.012.0010	VDCR2535	25	35	8	6	72
A0101.012.0011	VDCR3535	35	35	8	6	50
A0101.012.0012	VDCR5035	50	35	8	6	50
A0101.012.0013	VDCR2540	25	40	10	8	60
A0101.012.0014	VDCR4040	40	40	10	8	50
A0101.012.0015	VDCR6040	60	40	10	8	40
A0101.012.0016	VDCR8040	80	40	10	8	32
A0101.012.0017	VDCR2545	25	45	10	8	54
A0101.012.0018	VDCR3345	33	45	10	8	42
A0101.012.0019	VDCR4545	45	45	10	8	46
A0101.012.0020	VDCR6545	65	45	10	8	36
A0101.012.0021	VDCR2550	25	50	10	8	50
A0101.012.0022	VDCR3050	30	50	10	8	60
A0101.012.0023	VDCR3550	35	50	10	8	54
A0101.012.0024	VDCR4050	40	50	10	8	50
A0101.012.0025	VDCR4550	45	50	10	8	40
A0101.012.0026	VDCR5050	50	50	10	8	40
A0101.012.0027	VDCR5550	55	50	10	8	40
A0101.012.0028	VDCR6050	60	50	10	8	34
A0101.012.0029	VDCR8050	80	50	10	8	26
A0101.012.0030	VDCR10050	100	50	10	8	20
A0101.012.0031	VDCR2560	25	60	10	8	42
A0101.012.0032	VDCR3060	30	60	10	8	60
A0101.012.0033	VDCR3560	35	60	10	8	50
A0101.012.0034	VDCR4060	40	60	10	8	42
A0101.012.0035	VDCR4560	45	60	10	8	42
A0101.012.0036	VDCR5060	50	60	10	8	36
A0101.012.0037	VDCR5560	55	60	10	8	36
A0101.012.0038	VDCR6060	60	60	10	8	30
A0101.012.0039	VDCR8060	80	60	10	8	22
A0101.012.0040	VDCR10060	100	60	10	8	18
A0101.012.0041	VDCR7264	72	64	10	8	24
A0101.012.0042	VDCR2565	25	65	10	8	40
A0101.012.0043	VDCR3365	33	65	10	8	28
A0101.012.0044	VDCR4565	45	65	10	8	42
A0101.012.0045	VDCR6565	65	65	10	8	30


\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

## ☺ EASCO® VDCR Type Round Close Slot Wiring Duct (VDCR圆孔闭口环保配线槽)



WxH



VDCR Slot  
出线孔示意图

- G = Gray
- W = White
- B = Black
- BL = Blue

Article No.	Part No.	Wd. (W)	Ht. (H)	Finger Wd. (F)	Slot Wd. (E)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	齿宽 (F)	孔宽 (E)	包装数 (根)
A0101.012.0046	VDCR2575	25	75	10	8	50
A0101.012.0047	VDCR5075	50	75	10	8	24
A0101.012.0048	VDCR7575	75	75	10	8	16
A0101.012.0049	VDCR10075	100	75	10	8	12
A0101.012.0050	VDCR2580	25	80	10	8	32
A0101.012.0051	VDCR3080	30	80	10	8	40
A0101.012.0052	VDCR3580	35	80	10	8	36
A0101.012.0053	VDCR4080	40	80	10	8	32
A0101.012.0054	VDCR4580	45	80	10	8	28
A0101.012.0055	VDCR5080	50	80	10	8	24
A0101.012.0056	VDCR5580	55	80	10	8	24
A0101.012.0057	VDCR6080	60	80	10	8	20
A0101.012.0058	VDCR8080	80	80	10	8	16
A0101.012.0059	VDCR10080	100	80	10	8	12
A0101.012.0060	VDCR12080	120	80	10	8	10
A0101.012.0061	VDCR14080	140	80	10	8	8
A0101.012.0062	VDCR25100	25	100	10	8	50
A0101.012.0063	VDCR33100	33	100	10	8	36
A0101.012.0064	VDCR40100	40	100	10	8	28
A0101.012.0065	VDCR48100	48	100	10	8	24
A0101.012.0066	VDCR50100	50	100	10	8	24
A0101.012.0067	VDCR60100	60	100	10	8	20
A0101.012.0068	VDCR70100	70	100	10	8	16
A0101.012.0069	VDCR75100	75	100	10	8	16
A0101.012.0070	VDCR80100	80	100	10	8	16
A0101.012.0071	VDCR100100	100	100	10	8	12
A0101.012.0072	VDCR120100	120	100	10	8	8
A0101.012.0073	VDCR160100	160	100	10	8	8

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix G for Gray, W for White, BL for Blue, B for Black.

Example: VDCR5050G.

\*目录号必须添加后缀G(灰色), W(白色), BL(蓝色), B(黑色)。示例: VDCR5050G。

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

## ☺ EASCO® GQR Type Wiring Duct (Non-Slip Cover) (GQR型防滑盖环保配线槽)



Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



WxH



Article No.	Part No.	Wd. (W)	Ht. (H)	Finger Wd. (F)	Slot Wd. (E)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	齿宽 (F)	孔宽 (E)	包装数 (根)
A0101.013.0001	GQR2540	25	40	8	6	60
A0101.013.0002	GQR4040	40	40	8	6	50
A0101.013.0003	GQR6040	60	40	8	6	40
A0101.013.0004	GQR3345	33	45	8	6	42
A0101.013.0005	GQR4545	45	45	8	6	46
A0101.013.0006	GQR2550	25	50	8	6	50
A0101.013.0007	GQR3550	35	50	8	6	54
A0101.013.0008	GQR4550	45	50	8	6	40
A0101.013.0009	GQR5050	50	50	8	6	40
A0101.013.0010	GQR5550	55	50	8	6	40
A0101.013.0011	GQR6050	60	50	8	6	34
A0101.013.0012	GQR8050	80	50	8	6	26
A0101.013.0013	GQR2560	25	60	10	8	42
A0101.013.0014	GQR4060	40	60	10	8	42
A0101.013.0015	GQR5060	50	60	10	8	36
A0101.013.0016	GQR5560	55	60	10	8	36
A0101.013.0017	GQR6060	60	60	10	8	30
A0101.013.0018	GQR8060	80	60	10	8	22
A0101.013.0019	GQR7264	72	64	10	8	24
A0101.013.0020	GQR3365	33	65	10	8	28
A0101.013.0021	GQR4565	45	65	10	8	42
A0101.013.0022	GQR6565	65	65	10	8	30
A0101.013.0023	GQR2580	25	80	10	8	32
A0101.013.0024	GQR3580	35	80	10	8	36
A0101.013.0025	GQR4080	40	80	10	8	32
A0101.013.0026	GQR4580	45	80	10	8	28
A0101.013.0027	GQR5080	50	80	10	8	24
A0101.013.0028	GQR6080	60	80	10	8	20
A0101.013.0029	GQR8080	80	80	10	8	16
A0101.013.0030	GQR10080	100	80	10	8	12
A0101.013.0031	GQR12080	120	80	10	8	10
A0101.013.0032	GQR33100	33	100	10	10	36
A0101.013.0033	GQR35100	35	100	10	10	36
A0101.013.0034	GQR40100	40	100	10	10	28
A0101.013.0035	GQR50100	50	100	10	10	24
A0101.013.0036	GQR60100	60	100	10	10	20
A0101.013.0037	GQR80100	80	100	10	10	16
A0101.013.0038	GQR100100	100	100	10	10	12
A0101.013.0039	GQR120100	120	100	10	10	8

\*The product is sold as a set of base and cover, No need to order another cover.

\*本产品槽底槽盖整套出售, 无需额外订购盖板。

\*Catalog number must be completed by adding suffix G for Gray, W for White, BL for Blue, B for Black.  
Example: GQR5050G.

\*目录号必须添加后缀G (灰色), W (白色), BL (蓝色), B (黑色)。示例: GQR5050G。

## EASCO® FD Type Flexible Wiring Duct (FD型拨开式线槽)



Materials: Flexible Polypropylene.

Feature:

- UL Recognized continuous use temperature: 149°F(65°C).
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- UL 94 flammability rating of V-2 or V-0.
- Factory applied adhesive tape provided for easy mounting.


Standard Length: 500MM

Color: White(RAL9003), Gray(RAL7042), Black.

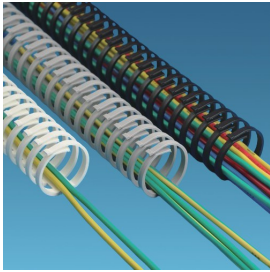

- G = Gray
- W = White
- B = Black

Article No.	Part No.	Wd. (W)	Ht. (H)	Color	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	颜色	包装数 (根)
A0101.014.0001	FD20G(V2)	20	20	Grey(灰色)	100
A0101.014.0002	FD30G(V2)	30	30	Grey(灰色)	100
A0101.014.0003	FD40G(V2)	38	35	Grey(灰色)	100
A0101.014.0004	FD20W(V2)	20	20	White(白色)	100
A0101.014.0005	FD30W(V2)	30	30	White(白色)	100
A0101.014.0006	FD40W(V2)	38	35	White(白色)	100
A0101.014.0007	FD20B(V2)	20	20	Black(黑色)	100
A0101.014.0008	FD30B(V2)	30	30	Black(黑色)	100
A0101.014.0009	FD40B(V2)	38	35	Black(黑色)	100
A0101.014.0010	FD20G(V0)	20	20	Grey(灰色)	100
A0101.014.0011	FD30G(V0)	30	30	Grey(灰色)	100
A0101.014.0012	FD40G(V0)	38	35	Grey(灰色)	100
A0101.014.0013	FD20W(V0)	20	20	White(白色)	100
A0101.014.0014	FD30W(V0)	30	30	White(白色)	100
A0101.014.0015	FD40W(V0)	38	35	White(白色)	100
A0101.014.0016	FD20B(V0)	20	20	Black(黑色)	100
A0101.014.0017	FD30B(V0)	30	30	Black(黑色)	100
A0101.014.0018	FD40B(V0)	38	35	Black(黑色)	100



## EASCO® FA Type Flexible Wiring Duct (FA型拨开式线槽)


Materials: Flexible Polypropylene.

Feature:

- UL Recognized continuous use temperature: 149°F(65°C).
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- UL 94 flammability rating of V-0.
- Factory applied adhesive tape provided for easy mounting.



Standard Length: 500MM

Color: Gray(RAL7042).



- G = Gray

Article No.	Part No.	Wd. (W)	Ht. (H)	Color	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	颜色	包装数 (根)
A0101.015.0001	FA25G(V0)	12.5	19	Grey(灰色)	100
A0101.015.0002	FA35G(V0)	25.4	35	Grey(灰色)	100





## ☺☺ EASCO® ED Type Floor PVC Trunking (ED型圆弧形地板线槽)



Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.

Length: 1.0M & 2.0M

Color: White(RAL9003), Gray(RAL7042). Other colors are also available.



Article No.	Part No.	Wd. (W)	Ht. (H)	Color	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	颜色	包装数 (根)
A0101.016.0001	ED30G	30	10	Grey(灰色)	100
A0101.016.0002	ED30W	30	10	White(白色)	100
A0101.016.0003	ED50G	50	14	Grey(灰色)	50
A0101.016.0004	ED50W	50	14	White(白色)	50
A0101.016.0005	ED70G	70	18	Grey(灰色)	25
A0101.016.0006	ED70W	70	18	White(白色)	25
A0101.016.0007	ED70G Separatio(隔离式)	70	18	Grey(灰色)	25
A0101.016.0008	ED70W Separatio(隔离式)	70	18	White(白色)	25
A0101.016.0009	ED90G Separatio(隔离式)	90	22	Grey(灰色)	25
A0101.016.0010	ED90W Separatio(隔离式)	90	22	White(白色)	25
A0101.016.0011	ED120G Separatio(隔离式)	120	25	Grey(灰色)	15
A0101.016.0012	ED120W Separatio(隔离式)	120	25	White(白色)	15

## ☺☺ EASCO® SRD Type Soft Wiring Duct (SRD型软质圆弧形地板线槽)



Materials: Soft PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.

Length: 10M

Color: Gray(RAL7042). Other colors are also available.



Article No.	Part No.	Wd. (W)	Ht. (H)	Color	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	颜色	包装数 (根)
A0101.017.0001	SRD1511G	15	11	Grey(灰色)	10M
A0101.017.0002	SRD5013G	50	13	Grey(灰色)	10M
A0101.017.0003	SRD6413G	64	13	Grey(灰色)	10M
A0101.017.0004	SRD7013G	70	13	Grey(灰色)	10M
A0101.017.0005	SRD7018G	70	18	Grey(灰色)	10M
A0101.017.0006	SRD7615G	76	15	Grey(灰色)	10M
A0101.017.0007	SRD8319G	83	19	Grey(灰色)	10M
A0101.017.0008	SRD10028G	100	28	Grey(灰色)	10M
A0101.017.0009	SRD16548G	165	48	Grey(灰色)	10M
A0101.017.0010	SRD1511B	15	11	Black(黑色)	10M
A0101.017.0011	SRD5013B	50	13	Black(黑色)	10M
A0101.017.0012	SRD6413B	64	13	Black(黑色)	10M
A0101.017.0013	SRD7013B	70	13	Black(黑色)	10M
A0101.017.0014	SRD7018B	70	18	Black(黑色)	10M
A0101.017.0015	SRD7615B	76	15	Black(黑色)	10M
A0101.017.0016	SRD8319B	83	19	Black(黑色)	10M
A0101.017.0017	SRD10028B	100	28	Black(黑色)	10M
A0101.017.0018	SRD16548B	165	48	Black(黑色)	10M

## CE EASCO® TF Type One Piece Wiring Duct (TF型一体式线槽)


Materials: Hardness PVC (White), UL approved PVC.

Feature:


- Easy for application and save work time. Ideal for concealing cabling.
- Allows quick access. The duct cover hinges provide easy access to cabling without the need to remove the duct cover.
- 94V-0 flammability rating, European standard M1 rating test, excellent fire resistance and good insulation, transition temperature 86°C.
- Can be opened and closed repeatedly without cracking.

Standard Length: 2 meters

Color: Standard Color White.



Article No.	Part No.	Wd. (W)	Ht. (H)	Color
货号	型号	宽度 (W)	高度 (H)	颜色
A0101.026.0001	TF1807	18	7	White(白色)
A0101.026.0002	TF1811	18	11	White(白色)
A0101.026.0003	TF2215	22	15	White(白色)
A0101.026.0004	TF3520	35	20	White(白色)
A0101.026.0005	TF5728	57	28	White(白色)
A0101.026.0006	TF8354	83	54	White(白色)

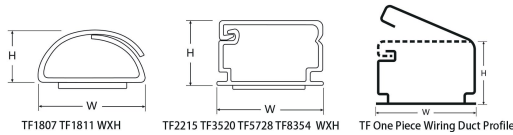

## CE EASCO® DIT Type PVC Trunking (DIT型插座面板线槽)

Materials: Hardness PVC (White), UL approved PVC.

Feature:


- Easy for application and save work time. Ideal for concealing cabling.
- Allows quick access. The duct cover hinges provide easy access to cabling without the need to remove the duct cover.
- 94V-0 flammability rating, European standard M1 rating test, excellent fire resistance and good insulation, transition temperature 86°C.
- With divider wall to easy categorize different cables.

Standard Length: 2 meters

Color: Standard Color White.



Article No.	Part No.	Wd. (W)	Ht. (H)	Thickness	Color	Pkg Qty (pcs)
货号	型号	宽 (W)	高 (H)	厚度 (T)	颜色	包装数 (根)
A0101.028.0001	DIT12050	120	50	2.38	White(白色)	4



## ☺ EASCO® DPT Type Decorative PVC Trunking (DPT型室内装潢线槽)



Materials: Hardness PVC (White), UL approved PVC.

Feature:

- Easy for application and save work time. Ideal for concealing cabling.
- Allows quick access. The duct cover hinges provide easy access to cabling without the need to remove the duct cover.
- 94V-0 flammability rating, European standard M1 rating test, excellent fire resistance and good insulation, transition temperature 86°C.
- Easy installation and operation due to the unique cover design.

Standard Length: 2 meters

Color: Standard Color White.



Article No.	Part No.	Wd. (W)	Ht. (H)	Extra	Standard	Economic	Thickness (T)	Pkg Qty (pcs)
货号	型号	宽度 (W)	高度 (H)	加厚型	标准型	经济型	厚度 (T)	包装数 (根)
A0101.027.0001	DPT1010	10	10		A		0.6	30
A0101.027.0002	DPT1510	15	10		A		0.65	30
A0101.027.0003	DPT1616	16	16		A		0.7	30
A0101.027.0004	DPT1616	16	16			B	0.6	30
A0101.027.0005	DPT2010	20	10		A		0.65	30
A0101.027.0006	DPT2010	20	10			B	0.5	30
A0101.027.0007	DPT2015	20	15	AT			1.2	25
A0101.027.0008	DPT2414	24	14		A		0.75	25
A0101.027.0009	DPT2414	25	14			B	0.6	25
A0101.027.0010	DPT2516	25	16		A		0.75	25
A0101.027.0011	DPT2516	25	16			B	0.6	25
A0101.027.0012	DPT2516	25	16	AT			1.1	25
A0101.027.0013	DPT2525	25	25		A		0.9	20
A0101.027.0014	DPT3015	30	15		A		0.75	20
A0101.027.0015	DPT3015	30	15			B	0.65	20
A0101.027.0016	DPT3919	39	19		A		0.85	15
A0101.027.0017	DPT3919	39	19			B	0.7	15
A0101.027.0018	DPT4020	40	20		A		0.9	15
A0101.027.0019	DPT4025	40	25		A		0.9	12
A0101.027.0020	DPT4040	40	40	AT			1.2	6
A0101.027.0021	DPT5025	50	25		A		1	10
A0101.027.0022	DPT5025	50	25			B	0.8	10
A0101.027.0023	DPT5030	50	30		A		1.2	10
A0101.027.0024	DPT5050	50	50	AT			1.2	4
A0101.027.0025	DPT5922	59	22		A		1	10
A0101.027.0026	DPT5922	59	22			B	0.8	10
A0101.027.0027	DPT6040	60	40		A		1.1	6
A0101.027.0028	DPT6040	60	40			B	0.9	6
A0101.027.0029	DPT7550	75	50		A		1.3	4
A0101.027.0030	DPT7575	75	75	AT			1.6	2
A0101.027.0031	DPT8040	80	40		A		1.3	4
A0101.027.0032	DPT8050	80	50		A		1.3	4
A0101.027.0033	DPT10027	100	27		A		1.4	6
A0101.027.0034	DPT10040	100	40		A		1.45	4
A0101.027.0035	DPT10050	100	50		A		1.5	3
A0101.027.0036	DPT10060	100	60		A		1.5	3
A0101.027.0037	DPT10075	100	75		A		1.8	2
A0101.027.0038	DPT100100	100	100		A		2.1	2
A0101.027.0039	DPT15050	150	50		A		1.8	2
A0101.027.0040	DPT200100	200	100		A		2.8	1

## EASCO® ELH Type Wiring Duct Divider (ELH型线槽中间隔板)



Materials: Made by hardness PVC, approved by UL flammability grade 94V-0 & European M1.

Feature:

- Wiring duct divider wall can be mounted inside any type of Panduit PVC wiring duct to create multiple channels.
- Simply install the divider wall base when mounting the duct and snap the divider wall onto the mounting base.
- 4 sizes available for applying with different sizes of the wiring ducts.
- Insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.


Standard Length: 2 meters

Color: Light Grey(RAL7035), Gray(RAL7042), Black, Blue(RAL5017).




- G = Gray
- W = White
- B = Black
- BL = Blue

Article No.	Part No.	Holes	Divider Height (H)	Thickness (T)	Color
货号	型号	特征	隔板高度 (H)	厚度 (T)	颜色
A0101.031.0001	ELHK50G	W(有孔)	43	1.7	Grey(灰色)
A0101.031.0002	ELHK60G	W(有孔)	53	1.7	Grey(灰色)
A0101.031.0003	ELHK80G	W(有孔)	73	1.7	Grey(灰色)
A0101.031.0004	ELHK100G	W(有孔)	90	1.7	Grey(灰色)
A0101.031.0005	ELHK50W	W(有孔)	43	1.7	White(白色)
A0101.031.0006	ELHK60W	W(有孔)	53	1.7	White(白色)
A0101.031.0007	ELHK80W	W(有孔)	73	1.7	White(白色)
A0101.031.0008	ELHK100W	W(有孔)	90	1.7	White(白色)
A0101.031.0009	ELHK50B	W(有孔)	43	1.7	Black(黑色)
A0101.031.0010	ELHK60B	W(有孔)	53	1.7	Black(黑色)
A0101.031.0011	ELHK80B	W(有孔)	73	1.7	Black(黑色)
A0101.031.0012	ELHK100B	W(有孔)	90	1.7	Black(黑色)
A0101.031.0013	ELHK50BL	W(有孔)	43	1.7	Blue(蓝色)
A0101.031.0014	ELHK60BL	W(有孔)	53	1.7	Blue(蓝色)
A0101.031.0015	ELHK80BL	W(有孔)	73	1.7	Blue(蓝色)
A0101.031.0016	ELHK100BL	W(有孔)	90	1.7	Blue(蓝色)
A0101.031.0017	ELH50G	W/O(无孔)	43	1.7	Grey(灰色)
A0101.031.0018	ELH60G	W/O(无孔)	53	1.7	Grey(灰色)
A0101.031.0019	ELH80G	W/O(无孔)	73	1.7	Grey(灰色)
A0101.031.0020	ELH100G	W/O(无孔)	90	1.7	Grey(灰色)
A0101.031.0021	ELH50W	W/O(无孔)	43	1.7	White(白色)
A0101.031.0022	ELH60W	W/O(无孔)	53	1.7	White(白色)
A0101.031.0023	ELH80W	W/O(无孔)	73	1.7	White(白色)
A0101.031.0024	ELH100W	W/O(无孔)	90	1.7	White(白色)
A0101.031.0025	ELH50B	W/O(无孔)	43	1.7	Black(黑色)
A0101.031.0026	ELH60B	W/O(无孔)	53	1.7	Black(黑色)
A0101.031.0027	ELH80B	W/O(无孔)	73	1.7	Black(黑色)
A0101.031.0028	ELH100B	W/O(无孔)	90	1.7	Black(黑色)
A0101.031.0029	ELH50BL	W/O(无孔)	43	1.7	Blue(蓝色)
A0101.031.0030	ELH60BL	W/O(无孔)	53	1.7	Blue(蓝色)
A0101.031.0031	ELH80BL	W/O(无孔)	73	1.7	Blue(蓝色)
A0101.031.0032	ELH100BL	W/O(无孔)	90	1.7	Blue(蓝色)

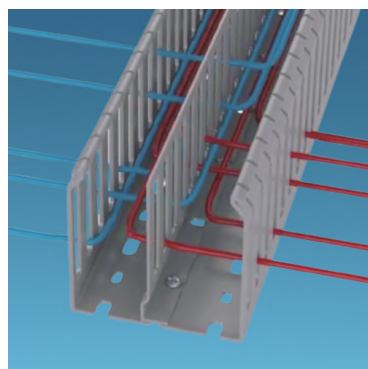

W(有孔)

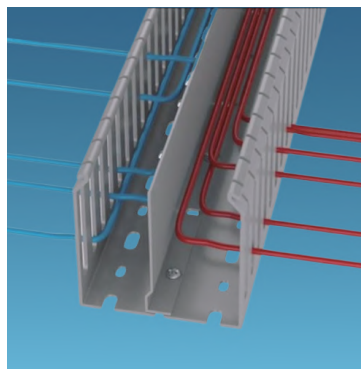

W/O(无孔)

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

A1. Wiring Ducts

## EASCO® LS Type Retainer (LS型线槽专用夹线套)

A2. Cable Ties

Materials:ABS.


Feature:

- Wire Retainers For holding wires during wiring operations, these retainers are essential.
- They allow easy access to the interior of the wire duct during maintenance or alterations.
- While assuring that wiring bundles will not fall out when the duct cover is removed.

A3. Din Rails

Color: Black.


A4. Cable Markers




A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland



A8. Metal Cable Gland



Bottom View(底视图)

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals


A13. Heat Shrinkable Tubings

## EASCO® R Type Rivet (Use With Wiring Duct) (R型配线槽专用尼龙铆钉)

Materials:Nylon.

Structure: secure the wiring duct with the nylon rivet through the mounting holes on duct base.

A14. Bus Bar Insulators




A15. Tool

A16. Cable Clip


A17. Insulating Nut

A18. Nylon Cable Carrier



Rivet(铆钉示意图)

Article No.	Part No.	Suitable Wire duct Size WxH	W	H	T	W1	Color
货号	型号	对应线槽规格 WxH					颜色
A0101.032.0001	LS4040	40x40	35	36	2.0	20	Black(黑色)
A0101.032.0002	LS6040	60x40	55	35	2.0	20	Black(黑色)
A0101.032.0003	LS4060	40x60	35	56	2.0	20	Black(黑色)
A0101.032.0004	LS6060	60x60	54	55	2.0	20	Black(黑色)
A0101.032.0005	LS8060	80x60	74	55	2.0	20	Black(黑色)
A0101.032.0006	LS10060	100x60	94	55	2.0	20	Black(黑色)
A0101.032.0007	LS12060	120x60	114	54	2.0	20	Black(黑色)
A0101.032.0008	LS4080	40x80	34	75	2.0	20	Black(黑色)
A0101.032.0009	LS6080	60x80	54	75	2.0	20	Black(黑色)
A0101.032.0010	LS8080	80x80	74	74	2.0	20	Black(黑色)
A0101.032.0011	LS10080	100x80	94	75	2.0	20	Black(黑色)
A0101.032.0012	LS12080	120x80	113	74	2.0	20	Black(黑色)
A0101.032.0013	LS60100	60x100	54	95	2.0	20	Black(黑色)
A0101.032.0014	LS80100	80x100	74	94	2.0	20	Black(黑色)
A0101.032.0015	LS100100	100x100	93	94	2.0	20	Black(黑色)
A0101.032.0016	LS150100	150x100	143	94	2.0	20	Black(黑色)

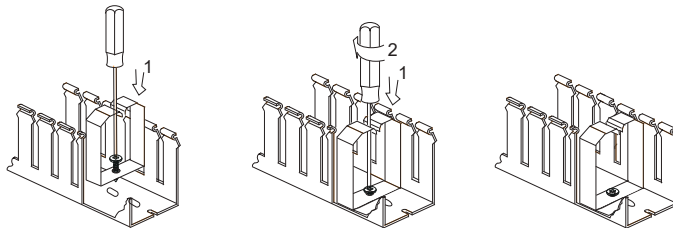

## **EASCO® DF Type Wiring Duct Bi-Adhesive Tape (DF型线槽专用双面胶)**


Materials: Acrylic acid

Feature:


- Recommended installation temperature is 70°F(21°C).
- Optimum recommended dwell time for acrylic adhesive is 8 hours.
- UL Recoanized service temperature is 32°F(0°C) to 140°F(60°C)
- Recommended tape load is 1/2 lb. per square inch of tape area

Standard Length: 25 meters

Color: Standard Color White.



Bi-Adhesive Tape(双面胶)

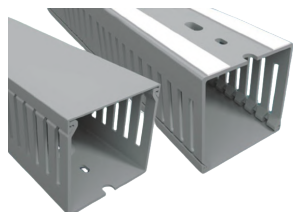

Article No.	Part No.	Adhesive Tape Wd. (W)	Packing
货号	型号	双面胶宽度 (W)	单卷米数
A0101.025.0001	DF13	13	25m
A0101.025.0002	DF20	20	25m
A0101.025.0003	DF25	25	25m
A0101.025.0004	DF33	33	25m
A0101.025.0005	DF50	50	25m

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

## EASCO® EARC Flame Retardant Duct Cover (EARC型阻燃环保线槽盖)



Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters



Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



Cover(盖板示意图)

Article No.	Part No.	Cover Wd. (W)	Color
货号	型号	盖板宽度 (W)	颜色
A0101.019.0001	EARC15G	15	Grey(灰色)
A0101.019.0002	EARC20G	20	Grey(灰色)
A0101.019.0003	EARC25G	25	Grey(灰色)
A0101.019.0004	EARC30G	30	Grey(灰色)
A0101.019.0005	EARC33G	33	Grey(灰色)
A0101.019.0006	EARC35G	35	Grey(灰色)
A0101.019.0007	EARC40G	40	Grey(灰色)
A0101.019.0008	EARC45G	45	Grey(灰色)
A0101.019.0009	EARC48G	48	Grey(灰色)
A0101.019.0010	EARC50G	50	Grey(灰色)
A0101.019.0011	EARC55G	55	Grey(灰色)
A0101.019.0012	EARC60G	60	Grey(灰色)
A0101.019.0013	EARC65G	65	Grey(灰色)
A0101.019.0014	EARC70G	70	Grey(灰色)
A0101.019.0015	EARC72G	72	Grey(灰色)
A0101.019.0016	EARC75G	75	Grey(灰色)
A0101.019.0017	EARC80G	80	Grey(灰色)
A0101.019.0018	EARC100G	100	Grey(灰色)
A0101.019.0019	EARC120G	120	Grey(灰色)
A0101.019.0020	EARC140G	140	Grey(灰色)
A0101.019.0021	EARC160G	160	Grey(灰色)
A0101.019.0022	EARC15W	15	White(白色)
A0101.019.0023	EARC20W	20	White(白色)
A0101.019.0024	EARC25W	25	White(白色)
A0101.019.0025	EARC30W	30	White(白色)
A0101.019.0026	EARC33W	33	White(白色)
A0101.019.0027	EARC35W	35	White(白色)
A0101.019.0028	EARC40W	40	White(白色)
A0101.019.0029	EARC45W	45	White(白色)
A0101.019.0030	EARC48W	48	White(白色)
A0101.019.0031	EARC50W	50	White(白色)
A0101.019.0032	EARC55W	55	White(白色)
A0101.019.0033	EARC60W	60	White(白色)
A0101.019.0034	EARC65W	65	White(白色)
A0101.019.0035	EARC70W	70	White(白色)
A0101.019.0036	EARC72W	72	White(白色)
A0101.019.0037	EARC75W	75	White(白色)
A0101.019.0038	EARC80W	80	White(白色)
A0101.019.0039	EARC100W	100	White(白色)
A0101.019.0040	EARC120W	120	White(白色)
A0101.019.0041	EARC140W	140	White(白色)
A0101.019.0042	EARC160W	160	White(白色)

**UL® SP® CE EASCO® EARC Flame Retardant Duct Cover (EARC型阻燃环保线槽盖)**



Cover(盖板示意图)

Article No.	Part No.	Cover Wd. (W)	Color
货号	型号	盖板宽度 (W)	颜色
A0101.019.0043	EARC15B	15	Black(黑色)
A0101.019.0044	EARC20B	20	Black(黑色)
A0101.019.0045	EARC25B	25	Black(黑色)
A0101.019.0046	EARC30B	30	Black(黑色)
A0101.019.0047	EARC33B	33	Black(黑色)
A0101.019.0048	EARC35B	35	Black(黑色)
A0101.019.0049	EARC40B	40	Black(黑色)
A0101.019.0050	EARC45B	45	Black(黑色)
A0101.019.0051	EARC48B	48	Black(黑色)
A0101.019.0052	EARC50B	50	Black(黑色)
A0101.019.0053	EARC55B	55	Black(黑色)
A0101.019.0054	EARC60B	60	Black(黑色)
A0101.019.0055	EARC65B	65	Black(黑色)
A0101.019.0056	EARC70B	70	Black(黑色)
A0101.019.0057	EARC72B	72	Black(黑色)
A0101.019.0058	EARC75B	75	Black(黑色)
A0101.019.0059	EARC80B	80	Black(黑色)
A0101.019.0060	EARC100B	100	Black(黑色)
A0101.019.0061	EARC120B	120	Black(黑色)
A0101.019.0062	EARC140B	140	Black(黑色)
A0101.019.0063	EARC160B	160	Black(黑色)
A0101.019.0064	EARC15BL	15	Blue(蓝色)
A0101.019.0065	EARC20BL	20	Blue(蓝色)
A0101.019.0066	EARC25BL	25	Blue(蓝色)
A0101.019.0067	EARC30BL	30	Blue(蓝色)
A0101.019.0068	EARC33BL	33	Blue(蓝色)
A0101.019.0069	EARC35BL	35	Blue(蓝色)
A0101.019.0070	EARC40BL	40	Blue(蓝色)
A0101.019.0071	EARC45BL	45	Blue(蓝色)
A0101.019.0072	EARC48BL	48	Blue(蓝色)
A0101.019.0073	EARC50BL	50	Blue(蓝色)
A0101.019.0074	EARC55BL	55	Blue(蓝色)
A0101.019.0075	EARC60BL	60	Blue(蓝色)
A0101.019.0076	EARC65BL	65	Blue(蓝色)
A0101.019.0077	EARC70BL	70	Blue(蓝色)
A0101.019.0078	EARC72BL	72	Blue(蓝色)
A0101.019.0079	EARC75BL	75	Blue(蓝色)
A0101.019.0080	EARC80BL	80	Blue(蓝色)
A0101.019.0081	EARC100BL	100	Blue(蓝色)
A0101.019.0082	EARC120BL	120	Blue(蓝色)
A0101.019.0083	EARC140BL	140	Blue(蓝色)
A0101.019.0084	EARC160BL	160	Blue(蓝色)

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier



A1. Wiring Ducts

## EASCO® EHFC Type Low Smoke Halogen Free Duct Cover (EHFC低烟无卤线槽盖)

A2. Cable Ties

Materials: Low Smoke Halogen Free.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.

A3. Din Rails

• Operating Temperature: -25°C to 90°C.

• EASCO offers a wide range of Wiring Ducts in materials that are compliant with the smoke generation and toxicity requirements of the EN 45545-2 European Railway Standards for fire safety classes R22 - R23 and Hazard Levels HL1 - HL2 - HL3.


A4. Cable Markers

• PC/ABS blend containing NO Bromide, NO Chlorine and NO Fluorine.

Standard Length: 2 meters

Color: Gray(RAL7035), Blue(RAL5015).

A5. Cable Clamps



Cover(盖板示意图)

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

Article No.	Part No.	Cover Wd. (W)	Color
货号	型号	盖板宽度 (W)	颜色
A0101.020.0001	EHFC25G	25	Light Grey(灰白色)
A0101.020.0002	EHFC35G	35	Light Grey(灰白色)
A0101.020.0003	EHFC40G	40	Light Grey(灰白色)
A0101.020.0004	EHFC50G	50	Light Grey(灰白色)
A0101.020.0005	EHFC60G	60	Light Grey(灰白色)
A0101.020.0006	EHFC75G	75	Light Grey(灰白色)
A0101.020.0007	EHFC80G	80	Light Grey(灰白色)
A0101.020.0008	EHFC100G	100	Light Grey(灰白色)
A0101.020.0009	EHFC120G	120	Light Grey(灰白色)

## EASCO® UHFC Type Low Smoke Halogen Free Duct Cover (UHFC低烟无卤线槽盖)

Materials: Low Smoke Halogen Free.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.



• Operating Temperature: -25°C to 90°C.

• EASCO offers a wide range of Wiring Ducts in materials that are compliant with the smoke generation and toxicity requirements of the EN 45545-2 European Railway Standards for fire safety classes R22 - R23 and Hazard Levels HL1 - HL2 - HL3.

• PC/ABS blend containing NO Bromide, NO Chlorine and NO Fluorine.

Standard Length: 2 meters

Color: Gray(RAL7035), Blue(RAL5015).



Cover(盖板示意图)

Article No.	Part No.	Cover Wd. (W)	Color
货号	型号	盖板宽度 (W)	颜色
A0101.021.0001	UHFC25G	25	Light Grey(灰白色)
A0101.021.0002	UHFC37.5G	37.5	Light Grey(灰白色)
A0101.021.0003	UHFC50G	50	Light Grey(灰白色)
A0101.021.0004	UHFC75G	75	Light Grey(灰白色)
A0101.021.0005	UHFC100G	100	Light Grey(灰白色)

## ☺ EASCO® GQRC Type Flame Retardant Non-Slip Duct Cover (GQRC防滑线槽盖)



Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters

Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



Cover(盖板示意图)

Article No.	Part No.	Cover Wd. (W)	Color
货号	型号	盖板宽度 (W)	颜色
A0101.023.0001	GQRC40G	40	Grey(灰色)
A0101.023.0002	GQRC45G	45	Grey(灰色)
A0101.023.0003	GQRC50G	50	Grey(灰色)
A0101.023.0004	GQRC55G	55	Grey(灰色)
A0101.023.0005	GQRC60G	60	Grey(灰色)
A0101.023.0006	GQRC65G	65	Grey(灰色)
A0101.023.0007	GQRC80G	80	Grey(灰色)
A0101.023.0008	GQRC100G	100	Grey(灰色)
A0101.023.0009	GQRC120G	120	Grey(灰色)

## ☺ EASCO® SCRC Type Flame Retardant Duct Cover (SCRC型带线阻燃环保线槽盖)



Materials: Lead-Free PVC.

Feature:

- Flame-retardant, self-extinguishing according to UL94-V0.
- They offer good insulation properties and are resistant to chemicals, making them suitable for a wide range of applications.
- Operating Temperature: -5°C to 60°C.
- Complies with RoHS regulations, Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

Standard Length: 2 meters



Color: White(RAL9003), Gray(RAL7042), Black, Blue(RAL5017). Other colors are also available.



Cover(盖板示意图)

Article No.	Part No.	Cover Wd. (W)	Color
货号	型号	盖板宽度 (W)	颜色
A0101.022.0001	SCRC25G	25	Grey(灰色)
A0101.022.0002	SCRC33G	33	Grey(灰色)
A0101.022.0003	SCRC35G	35	Grey(灰色)
A0101.022.0004	SCRC40G	40	Grey(灰色)
A0101.022.0005	SCRC45G	45	Grey(灰色)
A0101.022.0006	SCRC50G	50	Grey(灰色)
A0101.022.0007	SCRC55G	55	Grey(灰色)
A0101.022.0008	SCRC60G	60	Grey(灰色)
A0101.022.0009	SCRC65G	65	Grey(灰色)
A0101.022.0010	SCRC80G	80	Grey(灰色)
A0101.022.0011	SCRC100G	100	Grey(灰色)
A0101.022.0012	SCRC120G	120	Grey(灰色)
A0101.022.0013	SCRC140G	140	Grey(灰色)
A0101.022.0014	SCRC25W	25	White(白色)
A0101.022.0015	SCRC33W	33	White(白色)
A0101.022.0016	SCRC35W	35	White(白色)
A0101.022.0017	SCRC40W	40	White(白色)
A0101.022.0018	SCRC45W	45	White(白色)

## CE EASCO® SCRC Type Flame Retardant Duct Cover (SCRC型带线阻燃环保线槽盖)



Cover(盖板示意图)


Article No.	Part No.	Cover Wd. (W)	Color
货号	型号	盖板宽度 (W)	颜色
A0101.022.0019	SCRC50W	50	White(白色)
A0101.022.0020	SCRC55W	55	White(白色)
A0101.022.0021	SCRC60W	60	White(白色)
A0101.022.0022	SCRC65W	65	White(白色)
A0101.022.0023	SCRC80W	80	White(白色)
A0101.022.0024	SCRC100W	100	White(白色)
A0101.022.0025	SCRC120W	120	White(白色)
A0101.022.0026	SCRC140W	140	White(白色)
A0101.022.0027	SCRC25B	25	Black(黑色)
A0101.022.0028	SCRC33B	33	Black(黑色)
A0101.022.0029	SCRC35B	35	Black(黑色)
A0101.022.0030	SCRC40B	40	Black(黑色)
A0101.022.0031	SCRC45B	45	Black(黑色)
A0101.022.0032	SCRC50B	50	Black(黑色)
A0101.022.0033	SCRC55B	55	Black(黑色)
A0101.022.0034	SCRC60B	60	Black(黑色)
A0101.022.0035	SCRC65B	65	Black(黑色)
A0101.022.0036	SCRC80B	80	Black(黑色)
A0101.022.0037	SCRC100B	100	Black(黑色)
A0101.022.0038	SCRC120B	120	Black(黑色)
A0101.022.0039	SCRC140B	140	Black(黑色)
A0101.022.0040	SCRC25BL	25	Blue(蓝色)
A0101.022.0041	SCRC33BL	33	Blue(蓝色)
A0101.022.0042	SCRC35BL	35	Blue(蓝色)
A0101.022.0043	SCRC40BL	40	Blue(蓝色)
A0101.022.0044	SCRC45BL	45	Blue(蓝色)
A0101.022.0045	SCRC50BL	50	Blue(蓝色)
A0101.022.0046	SCRC55BL	55	Blue(蓝色)
A0101.022.0047	SCRC60BL	60	Blue(蓝色)
A0101.022.0048	SCRC65BL	65	Blue(蓝色)
A0101.022.0049	SCRC80BL	80	Blue(蓝色)
A0101.022.0050	SCRC100BL	100	Blue(蓝色)
A0101.022.0051	SCRC120BL	120	Blue(蓝色)
A0101.022.0052	SCRC140BL	140	Blue(蓝色)







## EASCO® DPT Type Trunking Connector (DPT型线槽接头)

Materials:ABS (White), flammability rating 94HB.

Feature:Suitable for connection with DPT making beautiful look and save working time.


Color: Standard Color White.



Article No.	Desp.	Part No.	Coping With DPT Part No.	Color
货号	接头名称	型号	对应 DPT 型线槽型号	颜色
A0101.029.0001	 Mid-Way Connector (中间接头)	DPTM2010	DPT2010	White(白色)
A0101.029.0002		DPTM2414	DPT2414	White(白色)
A0101.029.0003		DPTM3919	DPT3919	White(白色)
A0101.029.0004		DPTM5922	DPT5922	White(白色)
A0101.029.0005		DPTM6040	DPT6040	White(白色)
A0101.029.0006		DPTM10027	DPT10027	White(白色)
A0101.029.0007		DPTM10050	DPT10050	White(白色)
A0101.029.0008	 T Type Connector (T型接头)	DPTT2010	DPT2010	White(白色)
A0101.029.0009		DPTT2414	DPT2414	White(白色)
A0101.029.0010		DPTT3919	DPT3919	White(白色)
A0101.029.0011		DPTT5922	DPT5922	White(白色)
A0101.029.0012		DPTT6040	DPT6040	White(白色)
A0101.029.0013		DPTT10027	DPT10027	White(白色)
A0101.029.0014	DPTT10050	DPT10050	White(白色)	
A0101.029.0015	 Inside Connector (内弯接头)	DPTI2010	DPT2010	White(白色)
A0101.029.0016		DPTI2414	DPT2414	White(白色)
A0101.029.0017		DPTI3919	DPT3919	White(白色)
A0101.029.0018		DPTI5922	DPT5922	White(白色)
A0101.029.0019		DPTI6040	DPT6040	White(白色)
A0101.029.0020		DPTI10027	DPT10027	White(白色)
A0101.029.0021		DPTI10050	DPT10050	White(白色)
A0101.029.0022	 Outside Connector (外弯接头)	DPTO2010	DPT2010	White(白色)
A0101.029.0023		DPTO2414	DPT2414	White(白色)
A0101.029.0024		DPTO3919	DPT3919	White(白色)
A0101.029.0025		DPTO5922	DPT5922	White(白色)
A0101.029.0026		DPTO6040	DPT6040	White(白色)
A0101.029.0027		DPTO10027	DPT10027	White(白色)
A0101.029.0028		DPTO10050	DPT10050	White(白色)
A0101.029.0029	 L Type Connector (L型接头)	DPTL2010	DPT2010	White(白色)
A0101.029.0030		DPTL2414	DPT2414	White(白色)
A0101.029.0031		DPTL3919	DPT3919	White(白色)
A0101.029.0032		DPTL5922	DPT5922	White(白色)
A0101.029.0033		DPTL6040	DPT6040	White(白色)
A0101.029.0034		DPTL10027	DPT10027	White(白色)
A0101.029.0035		DPTL10050	DPT10050	White(白色)
A0101.029.0036	 End Cap Connector (末端接头)	DPTE2010	DPT2010	White(白色)
A0101.029.0037		DPTE2414	DPT2414	White(白色)
A0101.029.0038		DPTE3919	DPT3919	White(白色)
A0101.029.0039		DPTE5922	DPT5922	White(白色)
A0101.029.0040		DPTE6040	DPT6040	White(白色)
A0101.029.0041		DPTE10027	DPT10027	White(白色)
A0101.029.0042		DPTE10050	DPT10050	White(白色)


## **EASCO® DIT Type Trunking Connector (DIT型线槽接头)**

Materials:ABS (White), flammability rating 94HB.  
 Feature:Suitable for connection with DIT making beautiful look and save working time.  
 Color: Standard Color White.




DITE12050

DITL12050




DITM12050

DITO12050



DITI12050

DITT12050



DITP12050

DITS12050

Article No.	Part No.	Holes	Material	Color	Pkg Qty (pcs)
货号	型号	特征	材质	颜色	包装数 (个)
A0101.030.0001	DITE12050	End cap fitting for use with DIT12050 raceway	ABS	White(白色)	10
A0101.030.0002	DITL12050	Right angle fitting for use with DIT12050 raceway.	ABS	White(白色)	10
A0101.030.0003	DITM12050	Coupler fitting for use with DIT12050 raceway.	ABS	White(白色)	10
A0101.030.0004	DITO12050	Outside corner fitting for use with DIT12050 raceway.	ABS	White(白色)	10
A0101.030.0005	DITI12050	Inside corner fitting for use with DIT12050 raceway	ABS	White(白色)	10
A0101.030.0006	DITT12050	Tee fitting for use with DIT12050 raceway.	ABS	White(白色)	10
A0101.030.0007	DITP12050	Panel Screw Stand for use with DIT12050 raceway.	ABS	White(白色)	10
A0101.030.0008	DITS12050	Divider for use with DIT12050 raceway.	ABS	White(白色)	10