

## CE RoHS EASCO® Cross Recessed Pan Head Screws (十字盘头螺丝)

Materials: UL approved Nylon 66 / PC material, UL flammability grade 94V-2.

Application Area: For securing pc board and control panel.



Feature: Good insulation, anti-rust, anti-corrosion. Light material.

材质: UL合格之NYLON66/PC料,

防火等级94V-2

用途: PC板, 机板及固定作用

特点: 绝缘性佳, 不生锈, 不腐蚀, 重量轻

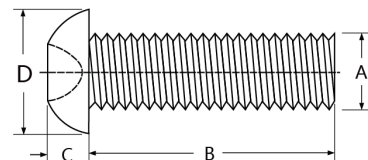

Article No.	Part No. (型号)		Dimension(尺寸)				Pitch	Color	Pkg Qty (pcs)
货号	Nylon(尼龙)	PC	A	B	C	D	螺距	颜色	包装数(个)
A0118.001.0000	PF2-6N	PF2-6	2.0	6	1.35	3.5	0.4	Natural (本色)	1000 (100)
A0118.001.0001	PF2-8N	PF2-8	2.0	8	1.35	3.5	0.4	Natural (本色)	1000 (100)
A0118.001.0002	PF2-10N	PF2-10	2.0	10	1.35	3.5	0.4	Natural (本色)	1000 (100)
A0118.001.0003	PF2.5-6N	PF2.5-6	2.5	6	2.0	4.3	0.45	Natural (本色)	1000 (100)
A0118.001.0004	PF2.5-8N	PF2.5-8	2.5	8	2.0	4.3	0.45	Natural (本色)	1000 (100)
A0118.001.0005	PF2.5-10N	PF2.5-10	2.5	10	2.0	4.3	0.45	Natural (本色)	1000 (100)
A0118.001.0006	PF3-6N	PF3-6	3.0	12	2.5	6.0	0.5	Natural (本色)	1000 (100)
A0118.001.0007	PF3-8N	PF3-8	3.0	8	2.5	6.0	0.5	Natural (本色)	1000 (100)
A0118.001.0008	PF3-10N	PF3-10	3.0	10	2.5	6.0	0.5	Natural (本色)	1000 (100)
A0118.001.0009	PF3-12N	PF3-12	3.0	12	2.5	6.0	0.5	Natural (本色)	1000 (100)
A0118.001.0010	PF3-15N	PF3-15	3.0	15	2.5	6.0	0.5	Natural (本色)	1000 (100)
A0118.001.0011	PF3-20N	PF3-20	3.0	20	2.5	6.0	0.5	Natural (本色)	1000 (100)
A0118.001.0012	PF3-22N	PF3-22	3.0	22	2.5	6.0	0.5	Natural (本色)	1000 (100)
A0118.001.0013	PF3-25N	PF3-25	4.0	25	2.5	6.0	0.5	Natural (本色)	1000 (100)
A0118.001.0014	PF4-6N	PF4-6	4.0	6	2.6	7.5	0.7	Natural (本色)	1000 (100)
A0118.001.0015	PF4-8N	PF4-8	4.0	8	2.6	7.5	0.7	Natural (本色)	1000 (100)
A0118.001.0016	PF4-10N	PF4-10	4.0	10	2.6	7.5	0.7	Natural (本色)	1000 (100)
A0118.001.0017	PF4-12N	PF4-12	4.0	12	2.6	7.5	0.7	Natural (本色)	1000 (100)
A0118.001.0018	PF4-15N	PF4-15	4.0	15	2.6	7.5	0.7	Natural (本色)	1000 (100)
A0118.001.0019	PF4-20N	PF4-20	4.0	20	2.6	7.5	0.7	Natural (本色)	1000 (100)
A0118.001.0020	PF4-25N	PF4-25	4.0	25	2.6	7.5	0.7	Natural (本色)	1000 (100)
A0118.001.0021	PF4-30N	PF4-30	4.0	30	2.6	7.5	0.7	Natural (本色)	1000 (100)
A0118.001.0022	PF2-6N B	PF2-6B	2.0	6	1.35	3.5	0.4	Black (黑色)	1000 (100)
A0118.001.0023	PF2-8N B	PF2-8B	2.0	8	1.35	3.5	0.4	Black (黑色)	1000 (100)
A0118.001.0024	PF2-10N B	PF2-10B	2.0	10	1.35	3.5	0.4	Black (黑色)	1000 (100)
A0118.001.0025	PF2.5-6N B	PF2.5-6B	2.5	6	2.0	4.3	0.45	Black (黑色)	1000 (100)
A0118.001.0026	PF2.5-8N B	PF2.5-8B	2.5	8	2.0	4.3	0.45	Black (黑色)	1000 (100)
A0118.001.0027	PF2.5-10N B	PF2.5-10B	2.5	10	2.0	4.3	0.45	Black (黑色)	1000 (100)
A0118.001.0028	PF3-6N B	PF3-6B	3.0	12	2.5	6.0	0.5	Black (黑色)	1000 (100)
A0118.001.0029	PF3-8N B	PF3-8B	3.0	8	2.5	6.0	0.5	Black (黑色)	1000 (100)
A0118.001.0030	PF3-10N B	PF3-10B	3.0	10	2.5	6.0	0.5	Black (黑色)	1000 (100)
A0118.001.0031	PF3-12N B	PF3-12B	3.0	12	2.5	6.0	0.5	Black (黑色)	1000 (100)
A0118.001.0032	PF3-15N B	PF3-15B	3.0	15	2.5	6.0	0.5	Black (黑色)	1000 (100)
A0118.001.0033	PF3-20N B	PF3-20B	3.0	20	2.5	6.0	0.5	Black (黑色)	1000 (100)
A0118.001.0034	PF3-22N B	PF3-22B	3.0	22	2.5	6.0	0.5	Black (黑色)	1000 (100)
A0118.001.0035	PF3-25N B	PF3-25B	4.0	25	2.5	6.0	0.5	Black (黑色)	1000 (100)
A0118.001.0036	PF4-6N B	PF4-6B	4.0	6	2.6	7.5	0.7	Black (黑色)	1000 (100)
A0118.001.0037	PF4-8N B	PF4-8B	4.0	8	2.6	7.5	0.7	Black (黑色)	1000 (100)
A0118.001.0038	PF4-10N B	PF4-10B	4.0	10	2.6	7.5	0.7	Black (黑色)	1000 (100)
A0118.001.0039	PF4-12N B	PF4-12B	4.0	12	2.6	7.5	0.7	Black (黑色)	1000 (100)
A0118.001.0040	PF4-15N B	PF4-15B	4.0	15	2.6	7.5	0.7	Black (黑色)	1000 (100)
A0118.001.0041	PF4-20N B	PF4-20B	4.0	20	2.6	7.5	0.7	Black (黑色)	1000 (100)
A0118.001.0042	PF4-25N B	PF4-25B	4.0	25	2.6	7.5	0.7	Black (黑色)	1000 (100)
A0118.001.0043	PF4-30N B	PF4-30B	4.0	30	2.6	7.5	0.7	Black (黑色)	1000 (100)

## CE RoHS EASCO® Metric Plastic Nut (公制塑胶螺母)



Materials: UL approved Nylon 66 / PC material, UL flammability grade 94V-2.


Application: For securing pc board and control panel.

Feature: Good insulation, anti-rust, anti-corrosion. Light material.

材质: UL合格之NYLON66/PC料, 防火等级94V-2

用途: PC板, 机板及固定作用

特点: 绝缘性佳, 不生锈, 不腐蚀, 重量轻

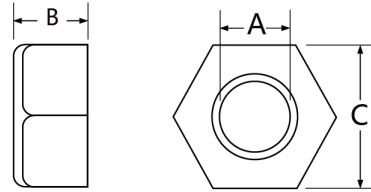



Article No.	Part No. (型号)		Dimension(尺寸)			Pitch	Color	Pkg Qty (pcs)
	Nylon(尼龙)	PC	A	B	C			
A0118.002.0000	PN-2N	PN-2	2.0	1.2	3.9	0.40	Natural (本色)	1000
A0118.002.0001	PN-2.5N	PN-2.5	2.5	2.0	5.0	0.45	Natural (本色)	1000
A0118.002.0002	PN-3N	PN-3	3.0	2.4	5.6	0.5	Natural (本色)	1000
A0118.002.0003	PN-4N	PN-4	4.0	3.2	7.0	0.7	Natural (本色)	1000
A0118.002.0004	PN-2N B	PN-2B	2.0	1.2	3.9	0.40	Black (黑色)	1000
A0118.002.0005	PN-2.5N B	PN-2.5B	2.5	2.0	5.0	0.45	Black (黑色)	1000
A0118.002.0006	PN-3N B	PN-3B	3.0	2.4	5.6	0.5	Black (黑色)	1000
A0118.002.0007	PN-4N B	PN-4B	4.0	3.2	7.0	0.7	Black (黑色)	1000

## CE RoHS EASCO® Nylon Screw (尼龙华司)



Materials: UL approved Nylon 66 / PC material, UL flammability grade 94V-2.

材质: UL合格之NYLON66, 防火等级94V-2




Article No.	Part No.	Dimension(尺寸)			Color	Pkg Qty(pcs)
		A	B	C		
A0118.006.0000	NW2.5~05	5.0	Φ2.5	0.5	Natural (本色)	1000
A0118.006.0001	NW2.5~08	5.0	Φ2.5	0.8	Natural (本色)	1000
A0118.006.0002	NW2.5~10	5.0	Φ2.5	1.0	Natural (本色)	1000
A0118.006.0003	NW3~05S	6.0	Φ3.0	0.5	Natural (本色)	1000
A0118.006.0004	NW3~08S	6.0	Φ3.0	0.8	Natural (本色)	1000
A0118.006.0005	NW3~10S	6.0	Φ3.0	1.0	Natural (本色)	1000
A0118.006.0006	NW3~15S	6.0	Φ3.0	1.5	Natural (本色)	1000
A0118.006.0007	NW3~20S	6.0	Φ3.0	2.0	Natural (本色)	1000
A0118.006.0008	NW3~05	8.0	Φ3.0	0.5	Natural (本色)	1000
A0118.006.0009	NW3~08	8.0	Φ3.0	0.8	Natural (本色)	1000
A0118.006.0010	NW3~10	8.0	Φ3.0	1.0	Natural (本色)	1000
A0118.006.0011	NW3~15	8.0	Φ3.0	1.5	Natural (本色)	1000
A0118.006.0012	NW3~20	8.0	Φ3.0	2.0	Natural (本色)	1000
A0118.006.0013	NW4~05	8.0	Φ4.0	0.5	Natural (本色)	1000
A0118.006.0014	NW4~08	8.0	Φ4.0	0.8	Natural (本色)	1000
A0118.006.0015	NW4~10	8.0	Φ4.0	1.0	Natural (本色)	1000
A0118.006.0016	NW4~15	8.0	Φ4.0	1.5	Natural (本色)	1000
A0118.006.0017	NW4~20	8.0	Φ4.0	2.0	Natural (本色)	1000

## CE RoHS EASCO® Plastic Screw (六角隔离柱)



Materials: UL approved Nylon 66 / PC material, UL flammability grade 94V-2.  
 Application Area: For securing pc board and control panel.  
 Feature: Good insulation, anti-rust, anti-corrosion. Light material.  
 材质: UL 合格之NYLON66/PC料, 防火等级94V-2  
 用途: PC板, 机板及固定作用  
 特点: 绝缘性佳, 不生锈, 不腐蚀, 重量轻

Article No.	Part No.	Dimension( 尺寸 )			Color	Pkg Qty (pcs)
		货号	型号	A		
A0118.003.0000	HTS-306	5.6	M3	6.0	Natural ( 本色 )	1000
A0118.003.0001	HTS-307	5.6	M3	7.0	Natural ( 本色 )	1000
A0118.003.0002	HTS-308	5.6	M3	8.0	Natural ( 本色 )	1000
A0118.003.0003	HTS-310	5.6	M3	10.0	Natural ( 本色 )	1000
A0118.003.0004	HTS-312A	5.6	M3	12.0	Natural ( 本色 )	1000
A0118.003.0005	HTS-312	5.6	M3	12.7	Natural ( 本色 )	1000
A0118.003.0006	HTS-315	5.6	M3	15.0	Natural ( 本色 )	1000
A0118.003.0007	HTS-318	5.6	M3	18.0	Natural ( 本色 )	1000
A0118.003.0008	HTS-320	5.6	M3	20.0	Natural ( 本色 )	1000
A0118.003.0009	HTS-322	5.6	M3	22.0	Natural ( 本色 )	1000
A0118.003.0010	HTS-325	5.6	M3	25.0	Natural ( 本色 )	1000
A0118.003.0011	HTS-330	5.6	M3	30.0	Natural ( 本色 )	1000
A0118.003.0012	HTS-410	7.0	M4	10.0	Natural ( 本色 )	1000
A0118.003.0013	HTS-413	7.0	M4	13.0	Natural ( 本色 )	1000
A0118.003.0014	HTS-415	7.0	M4	15.0	Natural ( 本色 )	1000
A0118.003.0015	HTS-419	7.0	M4	19.0	Natural ( 本色 )	1000
A0118.003.0016	HTS-425	7.0	M4	25.0	Natural ( 本色 )	1000
A0118.003.0017	HTP-306	5.6	M3	6.0	Natural ( 本色 )	1000
A0118.003.0018	HTP-308	5.6	M3	8.0	Natural ( 本色 )	1000
A0118.003.0019	HTP-310	5.6	M3	10.0	Natural ( 本色 )	1000
A0118.003.0020	HTP-312	5.6	M3	12.7	Natural ( 本色 )	1000
A0118.003.0021	HTP-315	5.6	M3	15.0	Natural ( 本色 )	1000
A0118.003.0022	HTP-318	5.6	M3	18.0	Natural ( 本色 )	1000
A0118.003.0023	HTP-320	5.6	M3	20.0	Natural ( 本色 )	1000
A0118.003.0024	HTP-322	5.6	M3	22.0	Natural ( 本色 )	1000
A0118.003.0025	HTP-325	5.6	M3	25.0	Natural ( 本色 )	1000
A0118.003.0026	HTP-330	5.6	M3	30.0	Natural ( 本色 )	1000
A0118.003.0027	HTP-410	7.0	M4	10.0	Natural ( 本色 )	1000
A0118.003.0028	HTP-413	7.0	M4	13.0	Natural ( 本色 )	1000
A0118.003.0029	HTP-415	7.0	M4	15.0	Natural ( 本色 )	1000
A0118.003.0030	HTP-419	7.0	M4	19.0	Natural ( 本色 )	1000
A0118.003.0031	HTP-425	7.0	M4	25.0	Natural ( 本色 )	1000

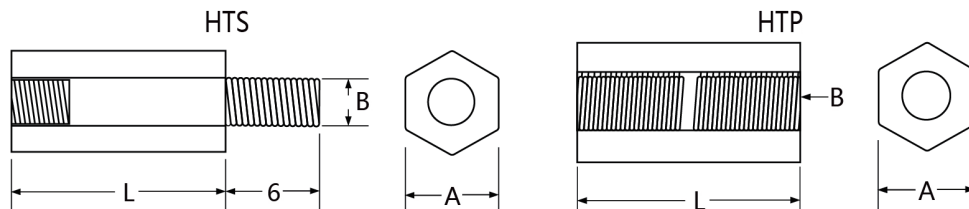

## CE RoHS EASCO® Metric Plastic Nut (公制塑胶螺母)




Materials: UL approved Nylon 66 / PC material, UL flammability grade 94V-2.

Application: For securing on pc board, easy installation without tools compares to screws.

材质: UL合格之NYLON66/PC料, 防火等级94V-2

用途: 用于PC板, 铁板零件固定, 代替螺丝, 省时不需工具

Article No.	Part No.	Diam	Plate Thickness	Dimension( 尺寸 )					Pull	Color	Pkg Qty (pcs)
				A	B	C	D	E			
货号	型号	直径	适用板厚	A	B	C	D	E	拔拉力	颜色	包装数 ( 个 )
A0118.004.0000	R2024	2.1	0.6~1.2	4.2	1.2	2.4	2.0	3.8	3kg	Natural,Black 本色, 黑色	1000
A0118.004.0001	R2032	2.1	1.3~2.0	4.2	1.2	3.2	2.0	3.8	3kg		1000
A0118.004.0002	R2040	2.1	2.1~2.8	4.2	1.2	4.0	2.0	5.5	3kg		1000
A0118.004.0003	R2048	2.1	2.9~3.6	4.2	1.2	4.8	2.0	5.5	3kg		1000
A0118.004.0004	R2056	2.1	3.7~4.4	4.2	1.2	5.6	2.0	7.2	3kg		1000
A0118.004.0005	R2064	2.1	4.5~5.2	4.2	1.2	6.4	2.0	7.2	3kg		1000
A0118.004.0006	R2632	2.7	1.0~2.0	5.0	1.4	3.2	2.6	4.6	5kg		1000
A0118.004.0007	R2642	2.7	2.1~3.0	5.0	1.4	4.2	2.6	4.6	5kg		1000
A0118.004.0008	R2648	2.7	2.7~3.6	5.0	1.4	4.8	2.6	6.2	5kg		1000
A0118.004.0009	R2655	2.7	3.4~4.3	5.0	1.4	5.5	2.6	6.2	5kg		1000
A0118.004.0010	R2664	2.7	4.3~5.2	5.0	1.4	6.4	2.6	7.8	5kg		1000
A0118.004.0011	R2672	2.7	5.1~6.0	5.0	1.4	7.2	2.6	7.8	5kg		1000
A0118.004.0012	R3035	3.1	1.0~2.0	6.4	1.6	3.5	3.0	5.1	8kg		1000
A0118.004.0013	R3045	3.1	2.0~3.0	6.4	1.6	4.5	3.0	6.1	8kg		1000
A0118.004.0014	R3055	3.1	3.0~4.0	6.4	1.6	5.5	3.0	6.1	8kg		1000
A0118.004.0015	R3065	3.1	4.0~5.0	6.4	1.6	6.5	3.0	7.1	8kg		1000
A0118.004.0016	R3075	3.1	5.0~6.0	6.4	1.6	7.5	3.0	9.0	8kg		1000
A0118.004.0017	R3080	3.1	5.5~ 6.5	6.4	1.6	8.0	3.0	9.0	8kg		1000
A0118.004.0018	R3090	3.1	6.5~7.5	6.4	1.6	9.0	3.0	11.0	8kg		1000
A0118.004.0019	R3100	3.1	7.5~8.5	6.4	1.6	10.0	3.0	11.0	8kg		1000
A0118.004.0020	R3230	3.1	20.5~21.5	6.4	1.6	23.0	3.0	24.0	8kg	1000	
A0118.004.0021	R3535	3.6	1.2~2.1	6.4	1.6	3.5	3.5	5.1	12kg	1000	
A0118.004.0022	R3545	3.6	2.2~3.1	6.4	1.6	4.5	3.5	6.1	12kg	1000	
A0118.004.0023	R3550	3.6	2.7~3.6	6.4	1.6	5.0	3.5	6.1	12kg	1000	
A0118.004.0024	R3555	3.6	3.2~4.1	6.4	1.6	5.5	3.5	7.1	12kg	1000	
A0118.004.0025	R3560	3.6	3.7~4.6	6.4	1.6	6.0	3.5	7.1	12kg	1000	
A0118.004.0026	R3570	3.6	4.7~5.5	6.4	1.6	7.0	3.5	9.1	12kg	1000	
A0118.004.0027	R3580	3.6	5.7~6.6	6.4	1.6	8.0	3.5	9.1	12kg	1000	
A0118.004.0028	R4050	4.1	2.5~3.5	8.0	1.8	5.0	4.0	7.1	20kg	1000	
A0118.004.0029	R4060	4.1	3.5~4.5	8.0	1.8	6.0	4.0	7.1	20kg	1000	
A0118.004.0030	R4070	4.1	4.5~5.5	8.0	1.8	7.0	4.0	9.0	20kg	1000	
A0118.004.0031	R4080	4.1	5.5~6.5	8.0	1.8	8.0	4.0	9.0	20kg	1000	
A0118.004.0032	R4090	4.1	6.5~7.5	8.0	1.8	9.0	4.0	11.0	20kg	1000	
A0118.004.0033	R4100	4.1	7.5~8.5	8.0	1.8	10.0	4.0	11.0	20kg	1000	
A0118.004.0034	R4120	4.1	9.0~10.5	8.0	1.8	12.0	4.0	14.0	20kg	1000	
A0118.004.0035	R5045	5.1	1.5~2.5	9.0	2.2	4.5	5.0	6.5	25kg	1000	
A0118.004.0036	R5055	5.1	2.5~3.5	9.0	2.2	5.5	5.0	6.5	25kg	1000	
A0118.004.0037	R5065	5.1	3.5~4.5	9.0	2.2	6.5	5.0	8.5	25kg	1000	
A0118.004.0038	R5075	5.1	4.5~5.5	9.0	2.2	7.5	5.0	8.5	25kg	1000	
A0118.004.0039	R5085	5.1	5.5~6.5	9.0	2.2	8.5	5.0	10.5	25kg	1000	
A0118.004.0040	R5095	5.1	6.5~7.5	9.0	2.2	9.5	5.0	10.5	25kg	1000	
A0118.004.0041	R5105	5.1	7.5~8.5	9.0	2.2	10.5	5.0	12.0	25kg	1000	
A0118.004.0042	R6060	6.1	2.5~4.0	12.0	2.5	6.0	6.0	9.0	30kg	1000	
A0118.004.0043	R6080	6.1	4.0~5.5	12.0	3.0	8.0	6.0	10.0	30kg	1000	

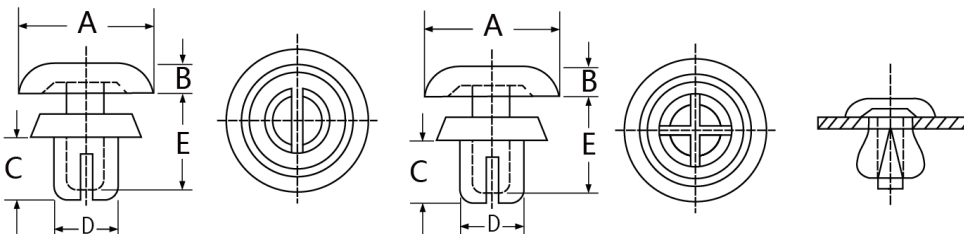

A1. Wiring Ducts

A2. Cable Ties

A3. Din Rails

A4. Cable Markers

A5. Cable Clamps

A6. Wrapping Bands

A7. Nylon Cable Gland

A8. Metal Cable Gland

A9. Plastic Flexible Conduit

A10. Metal Flexible Conduit

A11. Terminal

A12. Copper Tube Terminals

A13. Heat Shrinkable Tubings

A14. Bus Bar Insulators

A15. Tool

A16. Cable Clip

A17. Insulating Nut

A18. Nylon Cable Carrier

## CE RoHS EASCO® Cross Recessed Pan Head Screws (十字盘头螺丝)



Materials: UL approved Nylon 66 / PC material, UL flammability grade 94V-2.

Application: For securing with two pieces of iron plates, easy installation and removal without tools.

材质: UL合格之NYLON66/PC料, 防火等级94V-2

用途: 固定于两片铁板, 一般用于机器的门扣, 拆卸方便。

Article No.	Part No.	Dimension(尺寸)											Cable Range 取付口径		Color 颜色	Pkg Qty (pcs) 包装数 (个)			
		货号	型号	L	T	A	B	C	D	E	F	G	W	H			Not Fixed 移动侧	Fixed 固定侧	颜色
A0118.005.0000	SRG-1S	9.0	1.2	4.0	4.7														1000
A0118.005.0001	SRG-2S	9.5	1.6	4.0	4.7														1000
A0118.005.0002	SRG-1	9.8	1.2	5.0	6.2														1000
A0118.005.0003	SRG-2	10.2	1.6	5.0	6.2														1000
A0118.005.0004	SRG-3	11.2	2.5	5.0	6.2														1000
A0118.005.0005	SRG-4	12.8	4.1	5.0	6.2														1000
A0118.005.0006	SR-0809			8.5	7.1	1.9	6.3	7.1	13.6	11.0									1000
A0118.005.0007	SR-0810			8.5	7.1	1.9	6.3	8.1	18.4	11.5									1000
A0118.005.0008	SR-1010			10.8	7.4	2.6	8.0	9.2	19.1	12.9									1000
A0118.005.0009	SRV-0	8.6	1.1							1.5~3.7	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0010	SRV-1	9.0	1.6							2.0~4.2	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0011	SRV-2	10.0	2.5							3.0~5.2	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0012	SRV-3	11.7	4.1							4.6~6.9	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0013	SRV-4	12.9	5.3							5.8~8.1	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0014	SRE-0	8.6	1.1							1.5~3.7	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0015	SRE-1	9.0	1.6							2.0~4.2	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0016	SRE-2	10.0	2.5							3.0~5.2	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0017	SRE-3	11.7	4.1							4.6~6.9	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0018	SRE-4	12.9	5.3							5.8~8.1	10.8	2.0	7.6±0.1	8.1±0.1					1000
A0118.005.0019	SRR-1	8.0	1.1							1.5~3.7	8.5	1.8	6.0±0.1	6.4±0.1					1000
A0118.005.0020	SRR-2	8.5	1.6							2.0~4.2	8.5	1.8	6.0±0.1	6.4±0.1					1000
A0118.005.0021	SRR-3	9.5	2.5							3.0~5.2	8.5	1.8	6.0±0.1	6.4±0.1					1000
A0118.005.0022	SRR-4	11.0	4.1							4.6~6.9	8.5	1.8	6.0±0.1	6.4±0.1					1000

